



RoHS

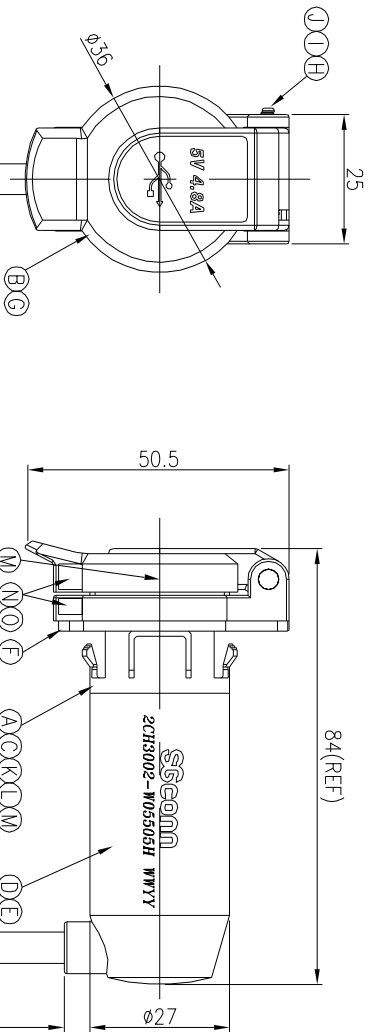


SGCONN
2CH3002-W05505H WYY
SERIAL NUMBER YEAR
WEEK

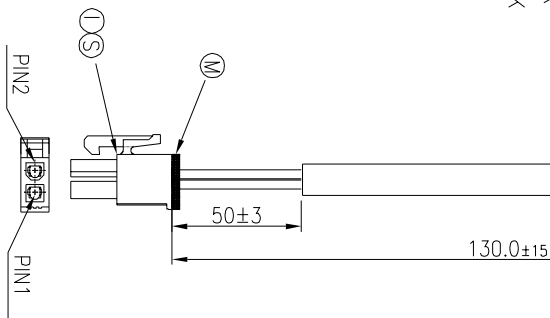

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - INPUT VOLTAGE: 10V~32V
 - OUTPUT VOLTAGE: 4.55V~5.25V
 - MAXIMUM OUTPUT CURRENT: 4.8A(2.4A+2.4A)
 - OPERATING TEMPERATURE: -20°C~+50°C
- LIFE TEST: 5,000 CYCLES.
- RoHS COMPLIANT
- NORMALLY CLOSED SPRING CAP

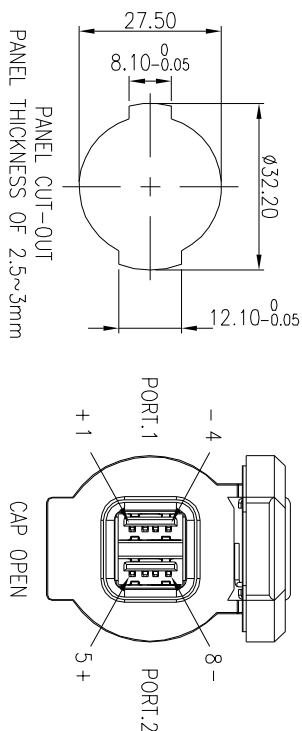

PANEL CUT-OUT
PANEL THICKNESS OF 2.5~3mm

CONN	WIRE	PORT 1	PORT 2
1	RED +	1	5
2	BLACK -	4	8

S	TERMINAL	2	MOX39000038	TIN PLATED
I	HOUSING	1	MOX39012020	NATURAL
Q	ROUND TUBE	1	PC	BLACK
P	CABLE	1	2464 AWM 20AWG 2C UV OD:5.0mm	BLACK
O	STOPPER	2	PVC	BLACK
N	MAGNET	2	NdFeB	NICKEL
M	GLUE	1	N/A	WHITE
L	USB2.0	1	N/A	N/A
K	PCBA	1	FR-4	N/A
J	AXIS	1	SUS	NATURAL
I	SPRING	1	SUS	NATURAL
H	E-RING	1	SUS	NATURAL
G	CAP GASKET	1	SILICONE	RED
F	GASKET	1	SILICONE	BLACK
E	OVER MOLD	1	TPU	BLACK
D	GLUE	1	N/A	BLACK
C	COVER	1	ABS	NATURAL
B	CAP	1	PC	BLACK
A	BODY	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2				
TITLE WATERPROOF USB CAR CHARGER 12V-24V 4.8A				
NORMALLY CLOSED SPRING CAP				
PART NO.2CH3002-W05505H				
CHKD Jun SCALE 1:1 UNIT: mm				
APVD JF SIZE: A3 SHEET:1 OF 1 REV: A				
CUSTOMER COPY				

REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T201228-2A	RZ	2021.12.20

