

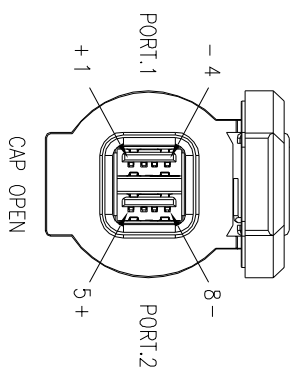

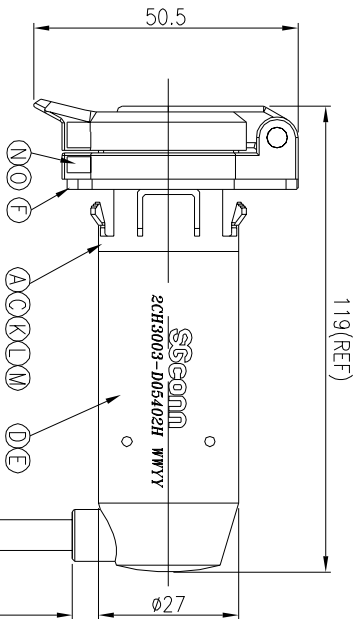


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A180507-4A		Jun	2018.11.19

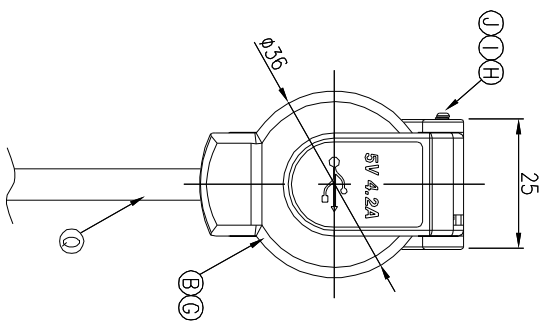

SGC00N
2CH3003-D05402H WYY
YEAR
WEEK

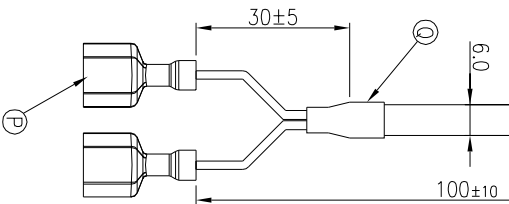

R	CABLE	1	2464 AWG 16AWG 2C	WIRE: RED & BLACK
Q	HEAT SHRINK TUBE	1	UV OD:6.0mm BLACK	BLACK
P	TERMINAL	2	MDFN2-250A/TE 3-520106-2	BARREL: BLUE
O	STOPPER	2	PVC	BLACK
N	MAGNET	2	NdFeB	NICKEL
M	GLUE	1	N/A	BLACK
L	USB2.0	1	N/A	DUAL PORT
K	PCBA	1	FR-4	N/A
J	AXIS	1	SUS304	NATURAL
I	SPRING	1	SUS304	NATURAL
H	E-RING	1	SUS304	NATURAL
G	CAP GASKET	1	SILICONE	RED
F	GASKET	1	SILICONE	BLACK
E	OVER MOLD	1	TPU	BLACK
D	TUBE	2	PC	BLACK
C	COVER	1	ABS	NATURAL
B	CAP	1	PC	BLACK
A	BODY	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2				
TITLE WATERPROOF USB CAP CHARGER 48V 4.2A				
DWN Jun PART NO.2CH3003-W05402H				
CHKD JF SCALE 1:1 UNIT: mm				
APVD William SIZE: A3 SHEET:1 OF 1 REV: A				
CUSTOMER COPY				

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
 - 1-1. INPUT VOLTAGE: 40V~60V
 - 1-2. OUTPUT VOLTAGE: 4.55V~5.25V
 - 1-3. MAXIMUM OUTPUT CURRENT: 4.2A(2.1A+2.1A)
 - 1-4. OPERATING TEMPERATURE: -20°C~+50°C
 2. LIFE TEST: 5,000 CYCLES.
 3. RoHS COMPLIANT
 4. NORMALLY CLOSED SPRING CAP
 5. This part is warranted to be free from defects in material and workmanship under normal use and service. This Limited Warranty extends 25months beginning on EZGo build date.
 6. EZGo P/N : 665766

WIRE	PORT 1	PORT 2
RED +	1	5
BLACK -	4	8