

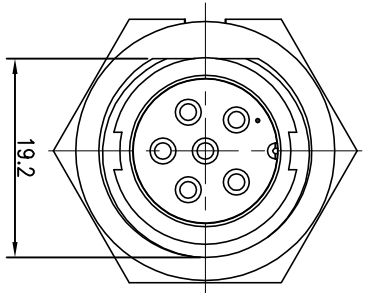


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T090824-5D~G	ULLY	2009.11.19	
B	ECN NO.:S121109	YF	2014.03.27	

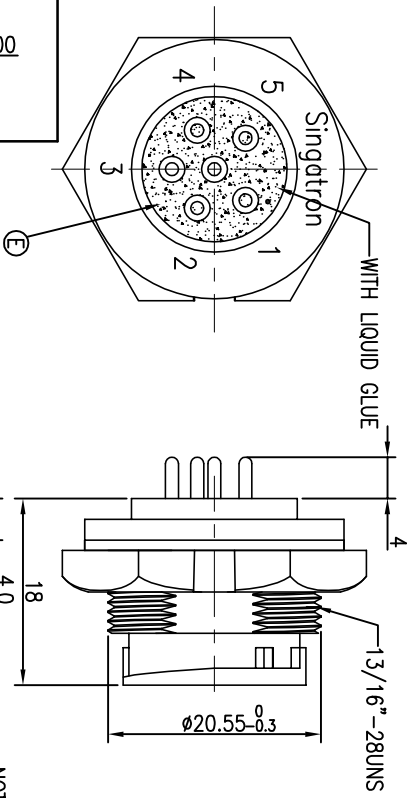


NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 10A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.F. PASS
6. FOR PANEL THICKNESS MAX OF 3.5mm
7. ORDER INFORMATION: 2CM3000-WOX400

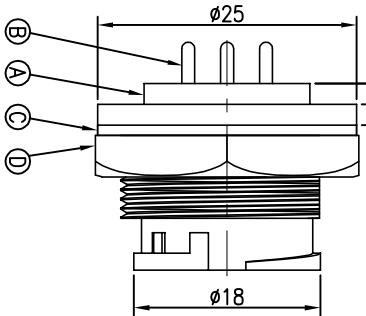

4-CURRENT RATING 10A
04- 4 PIN
05- 5 PIN
06- 6 PIN

	1	2	3
F			
E			
D	2CM3000-WO400		
C	2CM3000-WO5400		
B			
A	2CM3000-WO6400		
	P/N:	PIN ASSIGNMENTS FRONT VIEW	PCB LAYOUT



E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	NYLON+GF	BLACK
C	GASKET	1	EPDM	BLACK
B	MALE PIN	*	BRASS(HB159-1.5B)	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: CIRCULAR MIDDLE SIZE (PCB/LOCK TYPE)				
DWN	YF	PART NO.2CM3000-WOX400		
CHKD	Harlen	SCALE 2:1	UNIT: mm	
APVD	Quan	SIZE: A3	SHEET:1 OF 1	REV: B
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信音企業股份有限公司