



REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	T090824-5G/5H	Steve	2009.11.11
B	ECN NO.:	S121109	YF	2014.03.27

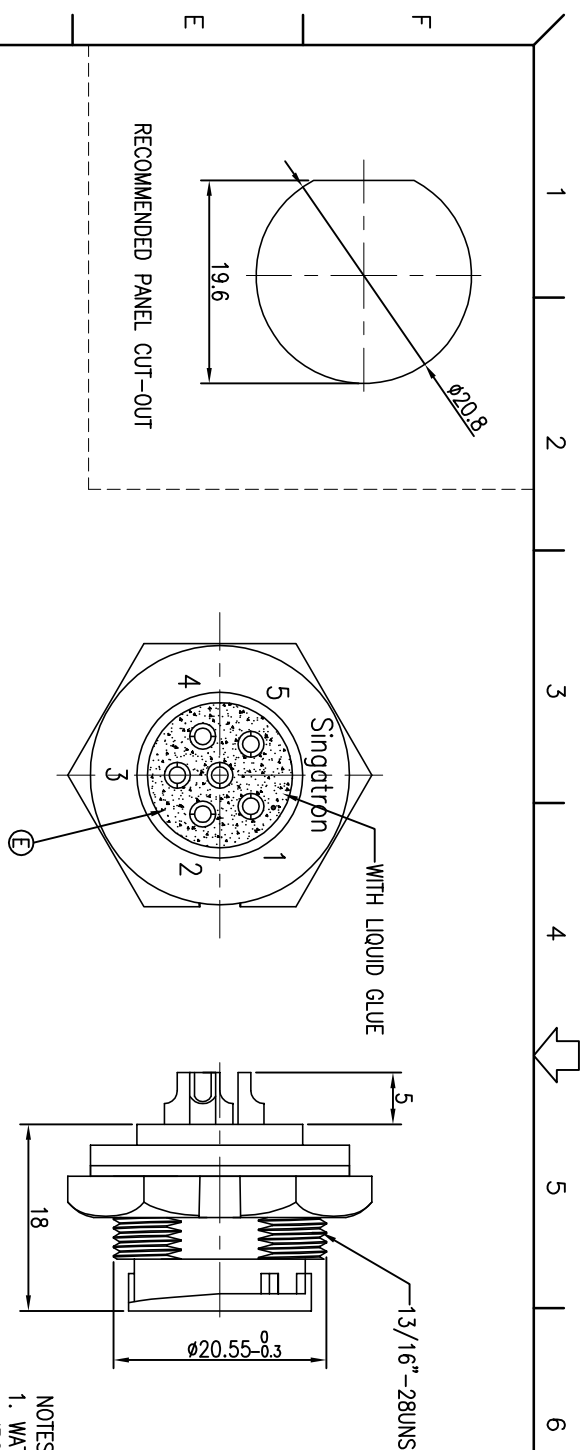

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 10A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
 3. SPECIFICATIONS: SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: CLP PASS
 6. FOR PANEL THICKNESS MAX OF 3.5mm
 7. ORDER INFORMATION: 2CM3002-W0X401

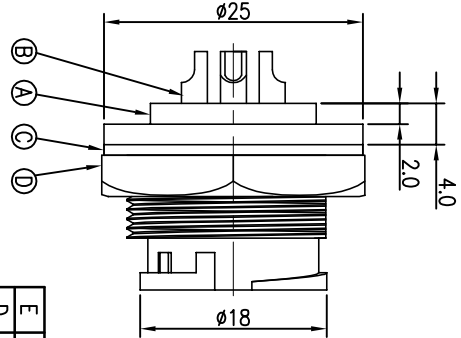

04- 4 PIN
06- 6 PIN

P/N:	2CM3002-P06401	2CM3002-P04401
	PIN ASSIGNMENTS FRONT VIEW	PIN ASSIGNMENTS FRONT VIEW

E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	PPE	BLACK
C	GASKET	1	EPDM	BLACK
B	MALE PIN	*	BRASS	1u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	PPE	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信昌企業股份有限公司				
TITLE CIRCULAR MIDDLE SIZE (SOLDER/LOCK TYPE)				
DECMALS: ANGLES: X :±0.5 X :±2° X.X :±0.3 X.X :±1° X.XX :±0.2				
DWN YF PART NO. 2CM3002-P0X401				
CHKD Harlen SCALE 2:1 UNIT: mm				
APVD Quon SIZE: A3 SHEET: 1 OF 1 REV: B				
CUSTOMER COPY				