

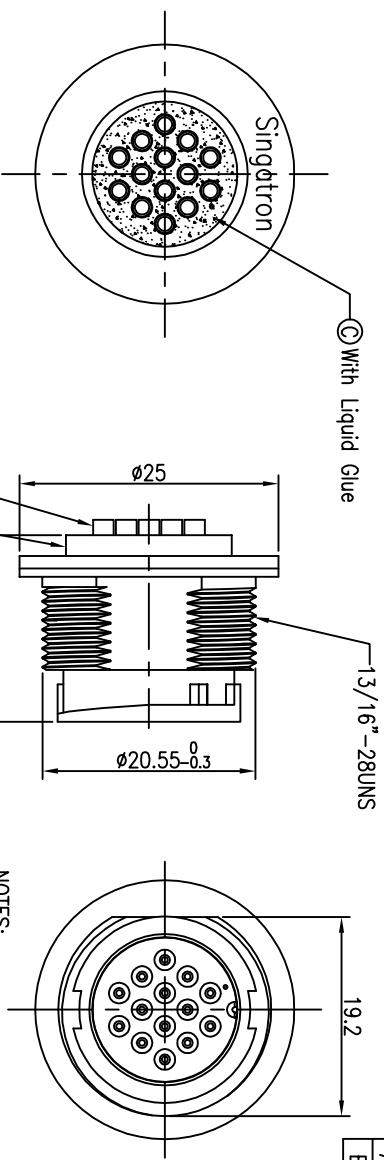


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:1180607-4A		JAY	2019.04.10
B	ECN NO.:A190712-C		JAY	2019.07.30

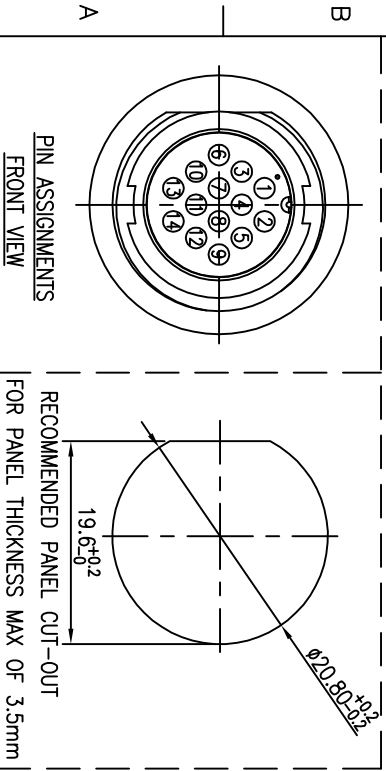

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 5 AMPS.
 - 1-2 CONTACT RESISTANCE: 30 mOhm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500 VAC PER MINUTE.
 - MECHANICAL CHARACTERISTICS:
 - 2-1 TIGHTENING TORQUES: 0.8~1.0Nm(7.08~8.85lbf.in.)
 - 2-2 MECHANICAL CHARACTERISTICS:CONTACT ACCOMMODATION: 22~24 AWG.
 - ENVIRONMENTAL:
 - 3-1 OPERATING TEMPERATURE: -40°C TO +105°C.
 - 4. LIFE TEST: 5,000 CYCLES MIN.
 - OTHER GENERAL SPEC. TO REFER"CIRCULAR SERIES GENERAL SPEC".
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL SINGATRON ELECTRONICS SALES OFFICE.
 - ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.F. PASS



C	LIQUID GLUE	1	N/A	BLACK
B	MALE PIN	14	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
TITLE		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:		MALE CONN. MALE 14 PIN(5A)		
X	:±0.5	X	:±2'	PART NO.2CM3002-W14308H
XX	:±0.3	XX	:±1'	SCALE 2:1 UNIT: mm
XXX	:±0.2	APVD	William	SIZE: A3 SHEET:1 OF 1 REV: B
CUSTOMER COPY				