

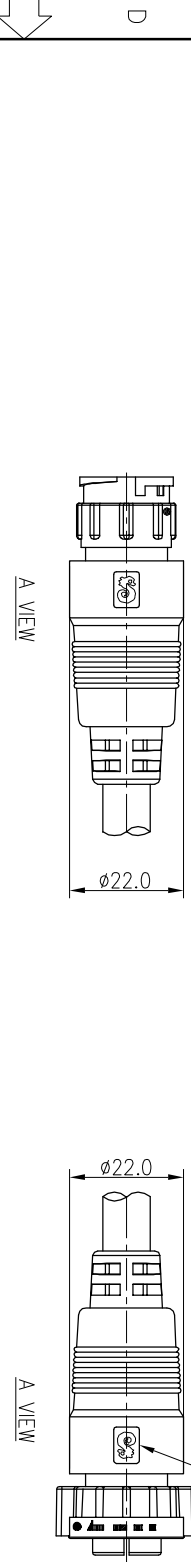


D			JF		2017.07.20	REV.	ECN NO OR DESCRIPTION	REVISED	DATE
ECN NO.S170736-R						A	PDR NO.:S130611-3E	JF	2013.11.11
						B	ECN NO.:S140802	JF	2014.09.03
						C	ECN NO.:S151202-C	JF	2015.12.04

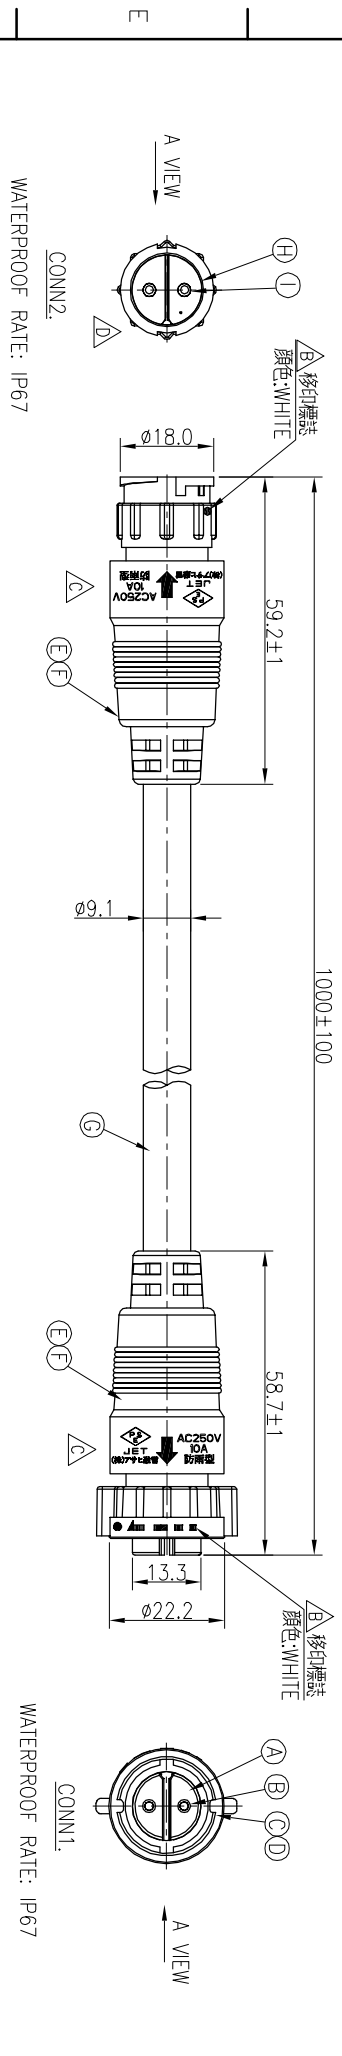

2	WHITE	2
1	BLACK	1
CONN1.	WIRE COLOR	CONN2.
B	PIN OUT	
CONN1.		CONN2.

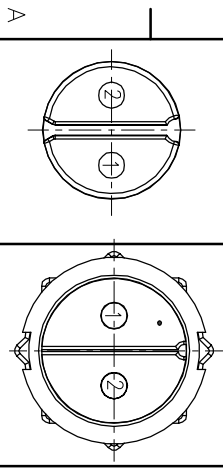

- NOTES:
1. WATERPROOF RATE: IP67
 2. IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 3. CURRENT RATING: 10A
 4. SPECIFICATIONS.SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

Pin Assignments
Front View

I	MALE PIN	2	BRASS	(1~3)u" GOLD PLATING OVER NICKEL PLATING
H	BODY	1	NYLON+33%GF	BLACK
G	CABLE	1	PSE 2PNC1T 2*0.75mm ² OD=9.1mm	BLACK(RUBBER JACKET)
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PC 9330	BLACK
B	FEMALE PIN	2	Phosphor Bronze	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS: ANGLES: TITLE TO M CONN. M PIN (2PIN)LOCK TYPE				
X	:±0.5	X	:±2°	DMN JF PART NO.2CM3004-W02405H
XX	:±0.3	XX	:±1°	CHKD Yang SCALE 1:1 UNIT: mm
XXX	:±0.2			APVD Horien SIZE: A3 SHEET:1 OF 1 REV: D
CUSTOMER COPY				