




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140311-10A	JF	2014.05.04

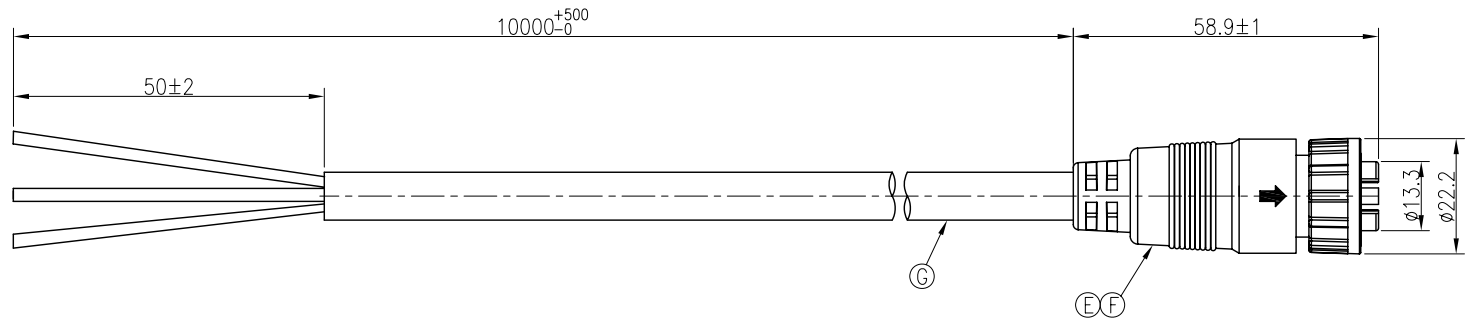

CONN.
WATERPROOF RATE: IP66

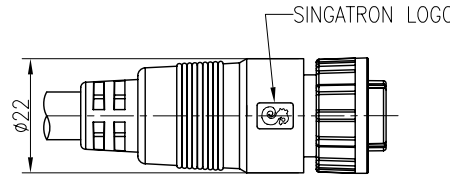

A VIEW

YELLOW/GREEN	3
BLUE	2
BROWN	1
WIRE COLOR	CONN.
PIN OUT	

CONN.

Pin Assignments
Front View

- NOTES:
- 1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 - 2. CURRENT RATING: 16A
 - 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 - 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

G	CABLE(客供)	1	H05V-F 3C*1.5mm ² OD8.0mm	BLACK
F	INNER MOLD	1	ABS 94V-0	NATURAL
E	OVER MOLD	1	PVC VW-1	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF 94V-0	BLACK
B	FEMALE PIN	3	Phosphor Bronze	(1~3)u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:		ANGLES:	TITLE CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE 3 PIN(16A) LOCK TYPE	
X	:±0.5	X	:±2°	DWN JF PART NO.2CM3004-W03681H
X.X	:±0.3	X.X	:±1°	CHKD Harlen SCALE 1:1 UNIT: mm
X.XX	:±0.2			APVD Quan SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				