

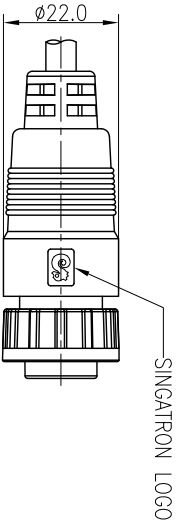



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S141216-1C	Yong	2015.01.21	

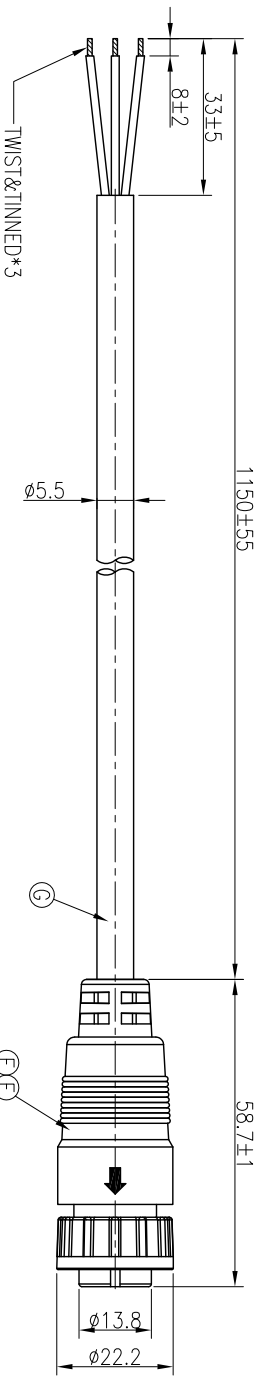

A VIEW

3	BLACK
2	RED
1	BLUE
CONN.	WIRE COLOR
PIN OUT	
CONN.	



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 16A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR PASS**

H	TUBE	3	125C 300V	BLACK
G	CABLE	1	UL2464 3C*18AWG +D+AL OD5.5 (UV)	BLACK(PVC JACKET)
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	3	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES: SINGATRON Enterprise Co., Ltd. 信管企業股份有限公司				
TITLE: CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE 3PIN(16A) LOCK TYPE				
X	:±0.5	X	:±2°	PART NO.:2CM3004-W03682H
X,X	:±0.3	X,X	:±1°	CHKD: Harden SCALE 1:1 UNIT: mm
X:XX	:±0.2			APVD: Steve SIZE: A2 SHEET:1 OF 1 REV:A

CUSTOMER COPY