



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140429-7A	JF	2014.06.03
B	ECN NO.:S141210	JF	2015.01.23

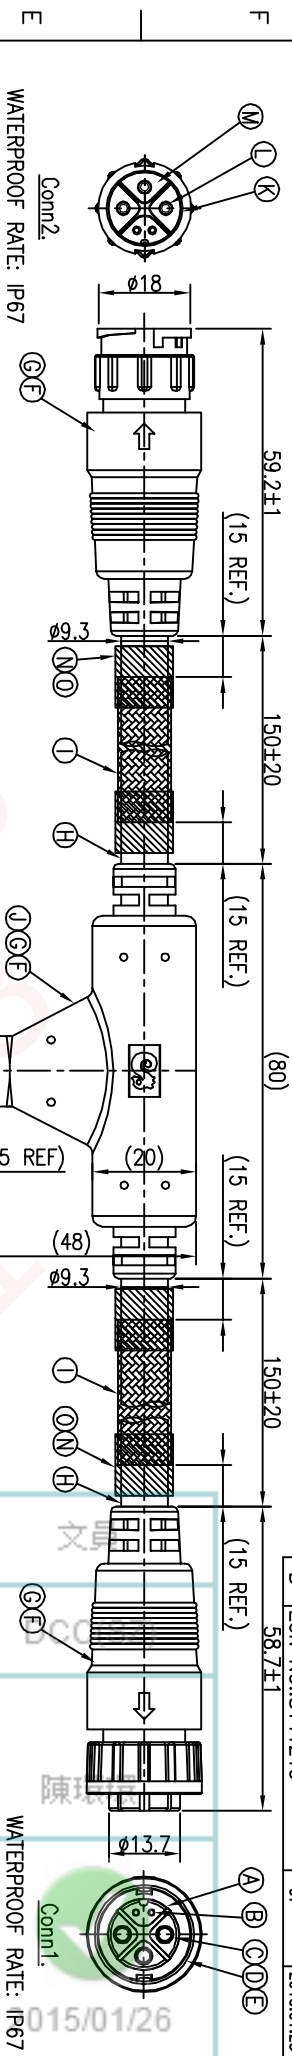


5	WHITE(24AWG)	5		
4	GREEN(24AWG)	4		
		3	YELLOW/GREEN	3
		2	BLUE	2
		1	BROWN	1
CONN2, WIRE COLOR	CONN1, WIRE COLOR	CONN3, WIRE COLOR		

PIN OUT

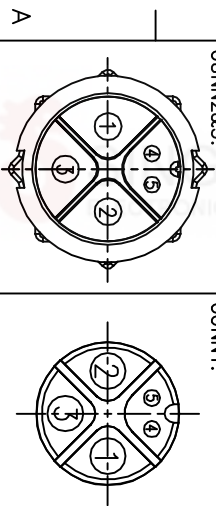

Pin Assignments
Front View

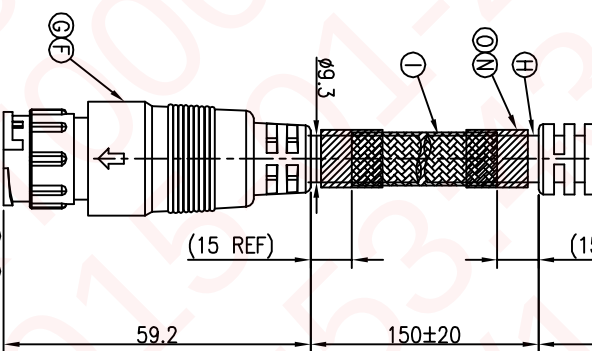

NOTES:

1. WATERPROOF RATE: IP67
2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

WATERPROOF RATE: IP67

0	ACETATE TAPE	6	W20 T0.18	BLACK
N	HEAT SHRINK TUBE	6	Ø15.0 L=20mm	BLACK
M	MALE PIN 2	4	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
L	MALE PIN	6	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
K	MALE BODY	2	NYLON+GF	BLACK
J	ACETATE CLOTH TAPE	5	W10.0*0.12T	BLACK
I	STAINLESS STEEL BRAD	3	STAINLESS STEEL	N/A
H	CABLE	3	UL2464 14#*3C+(CAT.5E 24#*1P+ADB) (UV) 009.3	BLACK(PVC JACKET)
G	INNER MOLD	4	TPU	NATURAL
F	OVER MOLD	4	PVC	BLACK
E	O-RING	1	EPDM	BLACK
D	LOCK NUT	1	NYLON+GF	BLACK
C	FEMALE PIN 2	2	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	3	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
A	FEMALE BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2
X.X :±0.3 X.X :±1
X.XX :±0.2

TITLE	CIRCULAR MIDDLE SIZE (IP67) LOCK TYPE
DWN	JF
CHKD	Harden
APVD	Quon
SIZE	A2
SHEET	1 OF 1
REV	B

CUSTOMER COPY