




REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140429-7B		JF	2014.06.03
B	ECN NO.:S141210		JF	2015.01.23

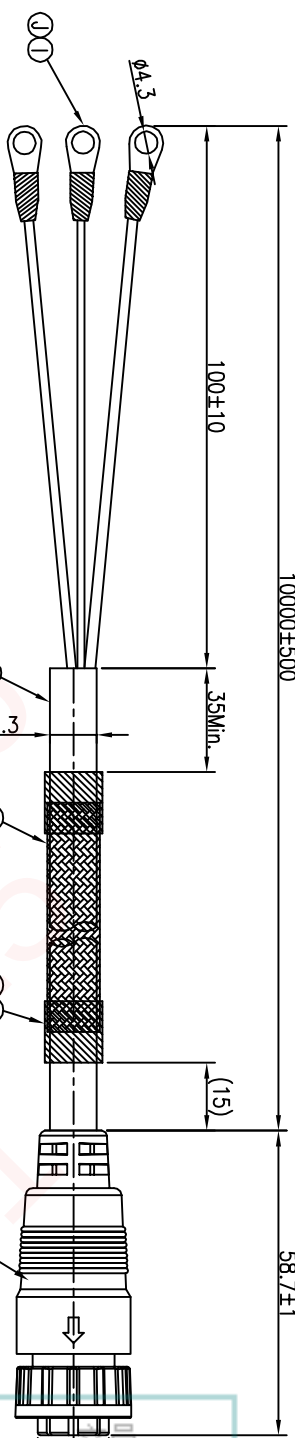

WATERPROOF RATE: IP67

Conn.

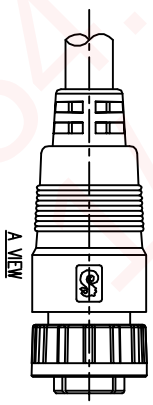

A VIEW

5	YELLOW/GREEN	3	-E
4	BLUE	2	-L
3	BROWN	1	-N
2	WIRE COLOR	1	CONN.
1	PIN OUT		



Pin Assignments
Front View

NOTES:

1. WATERPROOF RATE: IP67
2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

M	ACETATE TAPE	2	W20 TO.18	BLACK
L	HEAT SHRINK TUBE	2	ø15.0 L=20mm	BLACK
K	STAINLESS STEEL BRAID	1	STAINLESS STEEL	N/A
J	HEAT SHRINK TUBE	3	ø5.0 125' 600V	BLACK
I	O-TERMINAL	3	BRASS	TIN-PLATED
H	CABLE	1	UL2464 14#*3C+(CAT.5E 24#*1P+ADB) (UV) 009.3	BLACK(PVC JACKET)
G	INNER MOLD	1	TPU	NATURAL
F	OVER MOLD	1	PVC	BLACK
E	O-RING	1	EPDM	BLACK
D	LOCK NUT	1	NYLON+GF	BLACK
C	FEMALE PIN	2	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	3	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:		SINGAPORON ENTERPRISE CO., LTD.		
X :±0.5	X :±2°	信音企業股份有限公司		
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
TITLE		CIRCULAR MIDDLE SIZE (IP67) LOCK TYPE FEMALE CONN. FEMALE PIN (3+2)PIN(20+2A)		
DWN	JF	PART NO.2CM3004-W05E03H		
CHKD	Horlen	SCALE 1:1 UNIT: mm		
APVD	Quon	SIZE: A2 SHEET:1 OF 1		
REV: B				
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信昌企業股份有限公司