




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140429-7D	JF	2014.06.03
B	ECN NO.:S141210	JF	2015.01.23

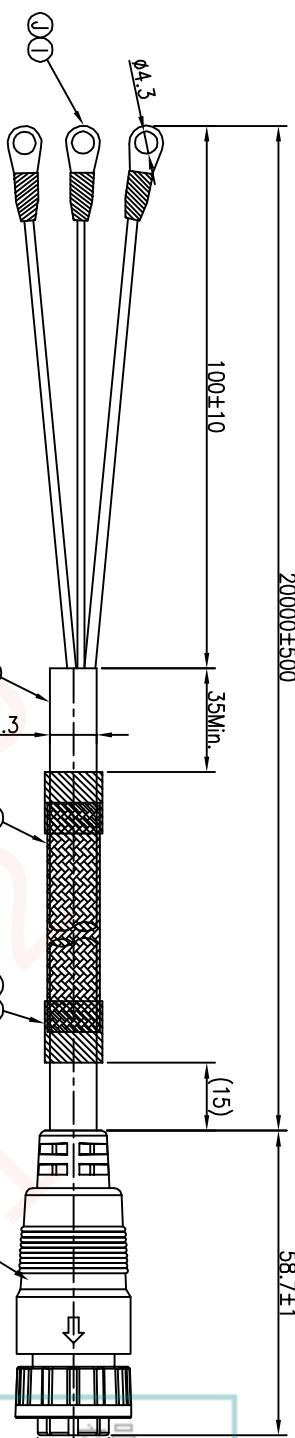


WATERPROOF RATE: IP67

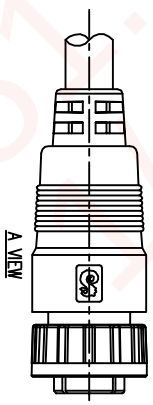

A VIEW

5	---
4	---
3	YELLOW/GREEN
2	BLUE
1	BROWN
CONN.	---
PIN OUT	---



NOTES:

1. WATERPROOF RATE: IP67
2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

M	ACETATE TAPE	2	W20 TO.18	BLACK
L	HEAT SHRINK TUBE	2	Ø15.0 L=20mm	BLACK
K	STAINLESS STEEL BRAID	1	STAINLESS STEEL	N/A
J	HEAT SHRINK TUBE	3	Ø5.0 125' 600V	BLACK
I	O-TERMINAL	3	BRASS	TIN-PLATED
H	CABLE	1	UL2464 14#*3C+(CAT.5E 24#*1P+ADB) (UV) 009.3	BLACK(PVC JACKET)
G	INNER MOLD	1	TPU	NATURAL
F	OVER MOLD	1	PVC	BLACK
E	O-RING	1	EPDM	BLACK
D	LOCK NUT	1	NYLON+GF	BLACK
C	FEMALE PIN	2	COPPER ALLOY	6u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	3	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: CIRCULAR MIDDLE SIZE (IP67) LOCK TYPE FEMALE CONN. FEMALE PIN (3+2)PIN(20+2A)				
DWN	JF	PART NO.	2CM3004-W05E05H	
CHKD	Harlen	SCALE	1:1	UNIT: mm
APVD	Quan	SIZE: A2	SHEET: 1 OF 1	REV: B

Singatron Enterprise Co., Ltd.



信昌企業股份有限公司

CUSTOMER COPY