




REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S140506	-5F~5J	JF	2014.06.03




Conn2.

WATERPROOF RATE: IP67

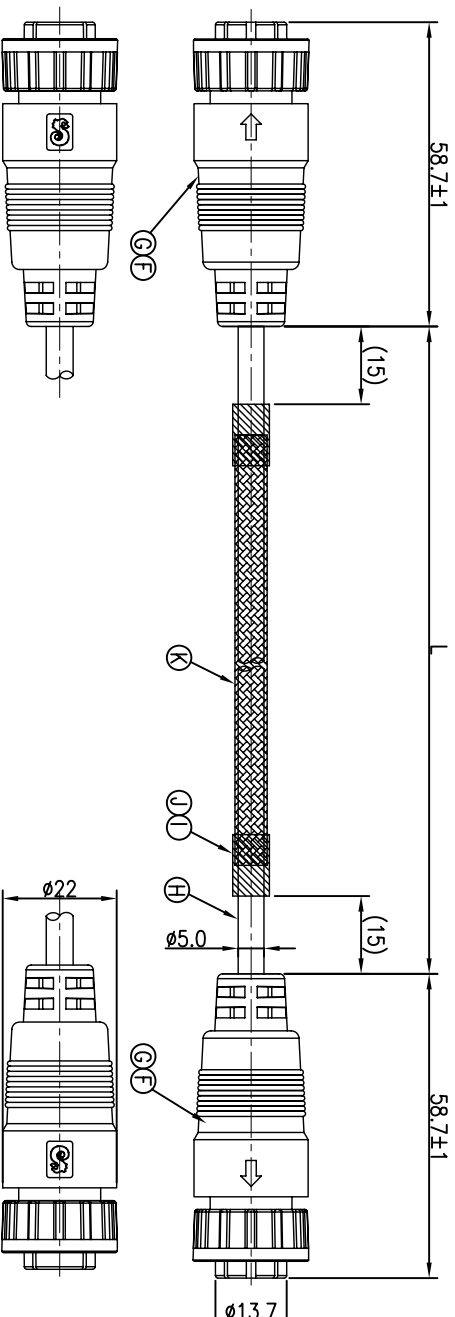

Conn1.


WATERPROOF RATE: IP67

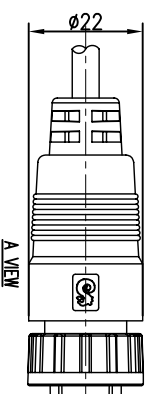

A VIEW

CUS P/N	SINGATRON P/N	CABLE LENGTH
216FK02FL75	2CM3004-W05E11H	L=7500±200mm
216FK02FL06	2CM3004-W05E12H	L=6000±200mm
216FK02FL45	2CM3004-W05E13H	L=4500±100mm
216FK02FL03	2CM3004-W05E14H	L=3000±100mm
216FK02FL15	2CM3004-W05E15H	L=1500±50mm

5	WHITE	5
4	GREEN	4
3	---	3
2	---	2
1	---	1
CONN2 WIRE COLOR CONNT.		
PIN OUT		
CONN1&2.		



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 20+2A(ONLY CONN.)
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: RoHS PASS

K	STAINLESS STEEL BRAD	1	STAINLESS STEEL	N/A
J	ACETATE TAPE	2	W20 T0.18	BLACK
I	HEAT SHRINK TUBE	2	Ø8.0	BLACK
H	CABLE	1	UL2464 24#*1P(CAT.5E)+AL (UV)	BLACK(PVC JACKET)
G	INNER MOLD	2	TPU	NATURAL
F	OVER MOLD	2	PVC	BLACK
E	O-RING	2	EPDM	BLACK
D	LOCK NUT	2	NYLON+GF	BLACK
C	FEMALE PIN	4	COPPER ALLOY	6u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	6	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
TITLE CIRCULAR MIDDLE SIZE (IP67) LOCK TYPE FEMALE CONN. FEMALE PIN (3+2)PIN(20+2A)				
DECIMALS:	ANGLES:	SINGATRON Enterprise Co., Ltd. 信昌企業股份有限公司		
X :±0.5	X :±2°	DWN	JF	PART NO.2CM3004-W05E1XH
X.X :±0.3	X.X :±1°	CHKD	Harden	SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	Quan	SIZE: A2 SHEET:1 OF 1 REV: A

CUSTOMER COPY