


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S150212-2A	JF	2015.12.11	



C	BLACK(22AWG)	6
	BRAID	5
	RED(22AWG)	4
	BROWN(1.5mm ²)	3
	BLUE(1.5mm ²)	2
	YELLOW/GREEN(0.5mm ²)	1
B	WIRE COLOR	CONN.
PIN OUT		
CONN.		
A	Pin Assignments Front View	

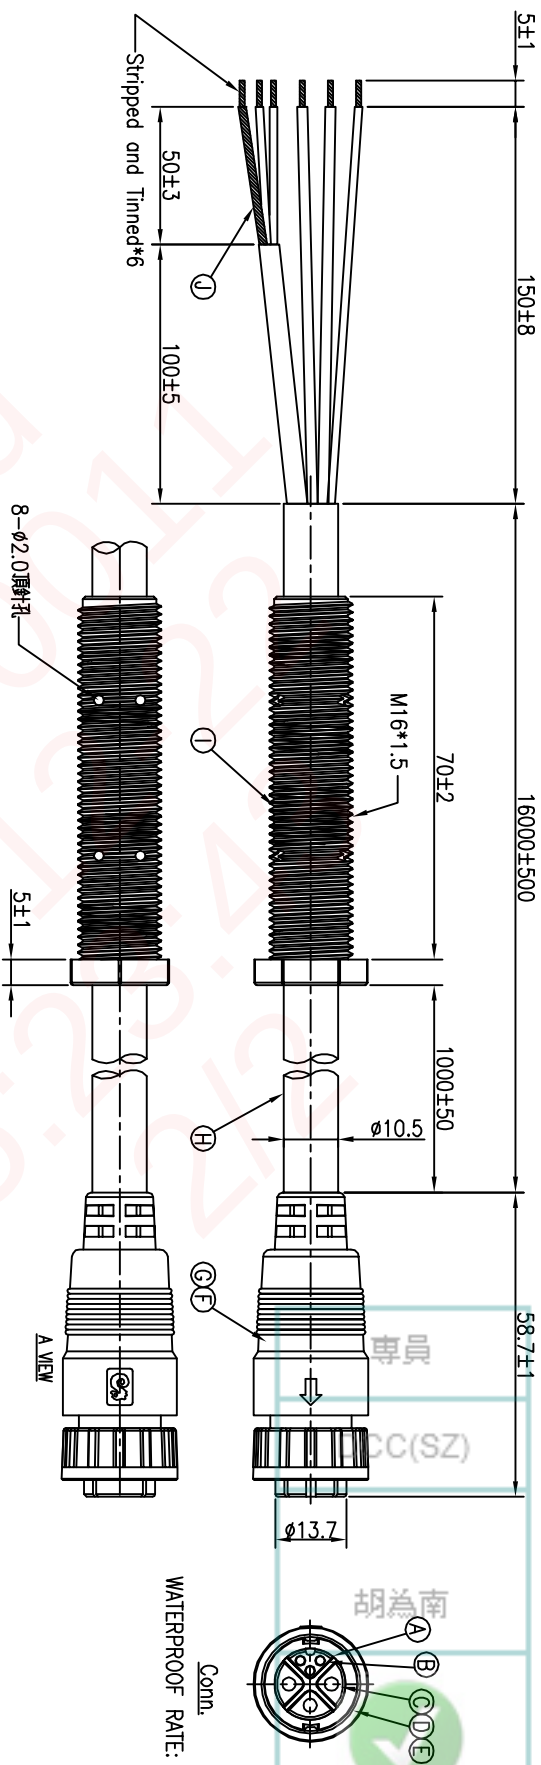

- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
CURRENT RATING: 10+5A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

J	HEAT SHRINK TUBE	1	φ1.5 125℃ 300V	BLACK
I	SR	1	ABS	BLACK
H	CABLE	1	(1P*22AWG+AB+COVERING) +2C*1.5mm ² +1*0.5mm ² +f+f+p	BLACK(MATT PU)
G	INNER MOLD	1	TPU	NATURAL
F	OVER MOLD	1	PVC	BLACK
E	O-RING	1	EPDM	BLACK
D	LOCK NUT	1	NYLON+GF	BLACK
C	FEMALE PIN	3	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	3	COPPER ALLOY	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5	X :±2°	TITLE CIRCULAR MIDDLE SIZE (IP67) LOCK TYPE FEMALE CONN. FEMALE PIN (3+3)PIN(10+5A) PART NO.2CM3004-M06842H		
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
APVD	Harfen	SIZE: A2	SHEET:1 OF 1	REV: A
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

胡為南
2015/12/22