



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:1160408-1A	Blues	2016.7.4	

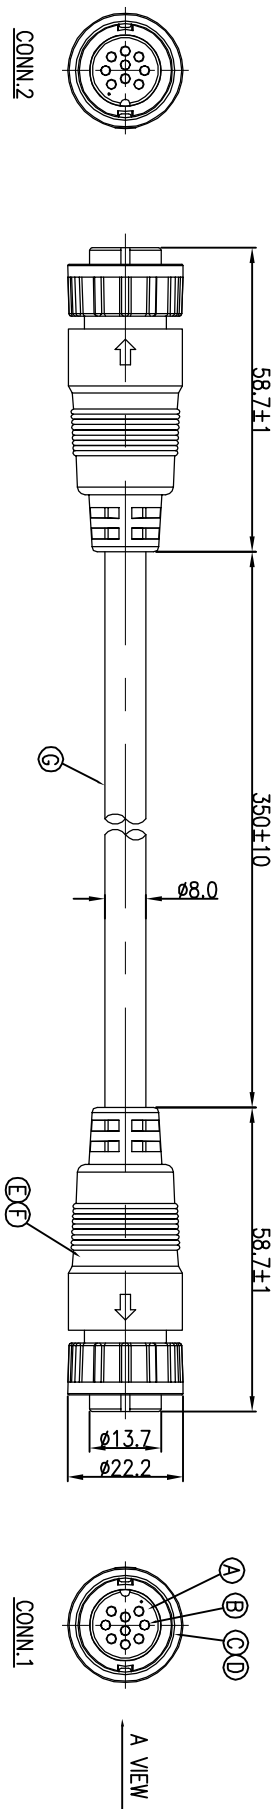


9	BLACK	9
8	RED	8
7	ORANGE	7
6	GREY	6
5	YELLOW	5
4	GREEN	4
3	WHITE	3
2	BLUE	2
1	BROWN	1
CONN.2	WIRE COLOR	CONN.1

PIN OUT



Pin Assignments
Front View

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. TEST CONDITIONS:
2-1. CONDUCTANCE RESISTANCE: 3 Ohm MAX
2-2. HI-POT TEST 500VAC 5mA(1SEC)
2-3. INSULATION RESISTANCE: 100MΩ MIN. BY 500V DC
2-4. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC".
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 

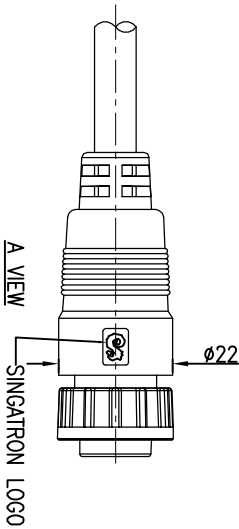

G	CABLE	1	UL2464 22AWG*9C+CY +AL	BLACK(PVC JACKET)
F	INNER MOLD	2	TPU	NATURAL
E	OVER MOLD	2	PVC	BLACK
D	O-RING	2	EPDM	BLACK
C	LOCK NUT	2	NYLON+GF	BLACK
B	FEMALE PIN	18	Phosphor Bronze	1~3μ" GOLD PLATING OVER NICKEL PLATING
A	BODY	2	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Enterprise Co., Ltd. 信昌企業股份有限公司				
TITLE CIRCULAR MIDDLE SIZE (P95) FEMALE CONN. FEMALE 9 PIN(GA) LOCK TYPE				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
APVD	Steve	SIZE: A3	SHEET:1 OF 1	REV:A

CUSTOMER COPY