




REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T080815C4C	Steve	2009.04.28	
B	ECN NO.:S151038-R/A	Vicky	2015.10.22	

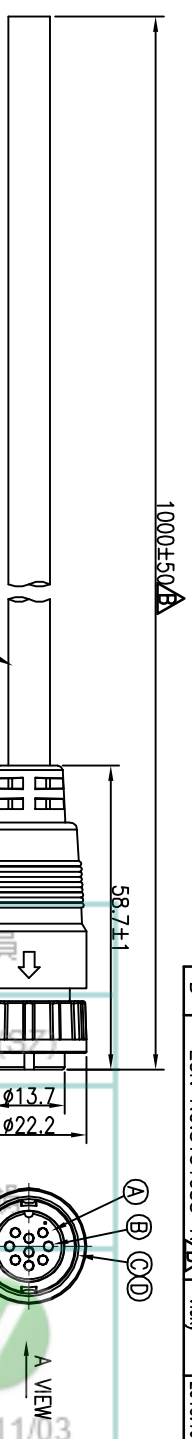

- NOTES:
1. WATERPROOF RATE: IP67
 2. CABLE JACKET MATERIAL: BLACK PVC
 3. TEST CONDITIONS:
 - 3-1. CONDUCTANCE RESISTANCE: 3 Ohm MAX
 - 3-2. HI-POT TEST 1000VAC/16A, 500VAC/5A 5mA(1SEC)
 - 3-3. INSULATION RESISTANCE: 100MΩ MIN. BY 500V DC
 - 3-4. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC".
 4. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:

D	2CM3004-W03600	UL2464 16AWG*3C+AI/My (UV Resistant),OD=ø7.0, Wire Color: 1.Brown 2.Blue 3.Black	16A
C	2CM3004-W07300	UL2464 24AWG*7C+AI/My (UV Resistant),OD=ø5.0, Wire Color: 1.Blue 2.Black 3.Yellow 4.Red 5.Brown 6.Green 7.White	5A
B	2CM3004-W08300	UL2464 24AWG*8C+AI/My (UV Resistant),OD=ø5.4, Wire Color: 1.Black 2.Brown 3.White 4.Blue 5.Red 6.Grey 7.Yellow 8.Green	5A
A	2CM3004-W09300	UL2464 24AWG*8C+AI/My (UV Resistant),OD=ø5.4, Wire Color: 1.Brown 2.Blue 3.White 4.Green 5.Yellow 6.Grey 7.Pink 8.Red 9.Black	5A

F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66	BLACK
B	FEMALE PIN	*	Phosphor Bronze C5210-EH 0.15T G2	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	PA66	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE (3-9) PIN LOCK TYPE				
DWN	Vicky	PART NO.	2CM3004-WXXX00	
CHKD	Horlen	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: B
CUSTOMER COPY				