

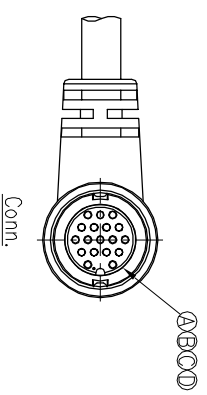


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A181017-3B	TZ		2018.11.12

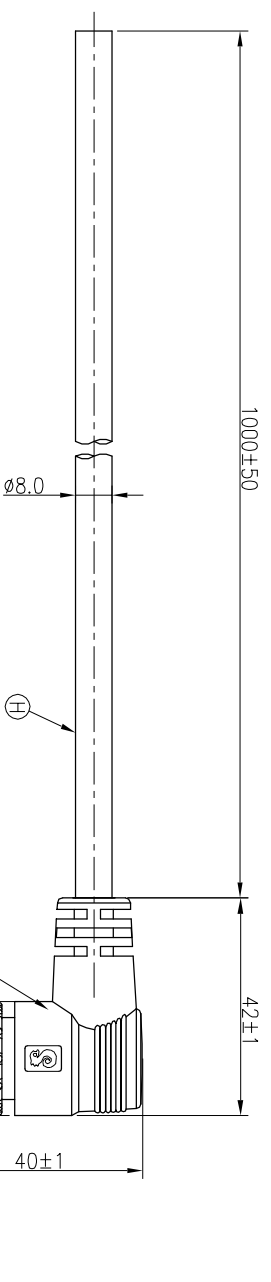

WATERPROOF RATE: IP67

ORANGE	18
BROWN/WHITE	17
RED	16
GRAY	15
RED/WHITE	14
LIGHT GREEN	13
BLACK	12
GREEN/WHITE	11
GREEN	10
BLACK/WHITE	9
PURPLE	8
YELLOW	7
WHITE	6
ORANGE/WHITE	5
BLUE/WHITE	4
BLUE	3
BROWN	2
PINK	1
WIRE COLOR	CONN
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP67
 2. ELECTRICAL CHARACTERISTICS
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
- CURRENT RATING: 2A
- CONNECTOR BODY(-40°C TO +105°C)
- CABLE(-30°C TO +85°C)

H	CABLE	1	UL2464 24AWG*18C+AL	BLACK(PVC JACKET)
G	HEAT SHRINK TUBE	18	Ø1.5 125°C 300V	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	18	COPPER ALLOY	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
TITLE CIRCULAR MIDDLE SIZE (IP67) SINGATRON ENTERPRISE CO., LTD. 信晉企業股份有限公司				
DECIMALS: ANGLES: DWG X :±0.5 X :±2° CHKD JF SCALE 1:1 UNIT: mm SHEET: 1 OF 1 REV: A				
X.XX :±0.2				
CUSTOMER COPY				