

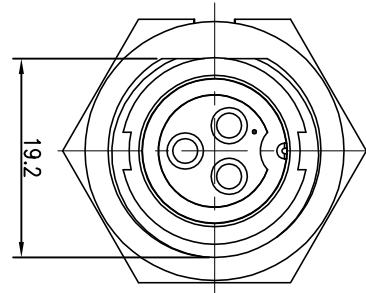
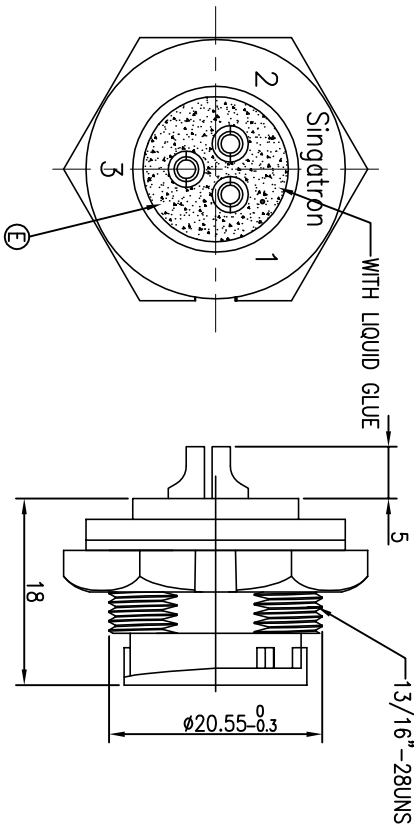



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T090816-1A	Harlen	2009.04.28
B	ECN NO.:S121109	YF	2014.03.27



PIN ASSIGNMENTS
FRONT VIEW



RECOMMENDED PANEL CUT-OUT

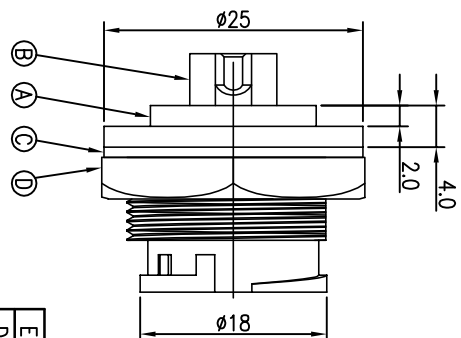

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 16A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS"
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
 6. FOR PANEL THICKNESS MAX OF 3.5mm

E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	NYLON+GF	BLACK
C	GASKET	1	EPDM	BLACK
B	FEMALE PIN	3	Phosphor Bronze Alloy	1u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: CIRCULAR MIDDLE SIZE (LOCK TYPE)				
DWN	YF	PART NO.	2CM3014-W036A0	
CHKD	Harlen	SCALE	2:1	UNIT: mm
APVD	Quan	SIZE	A3	SHEET: 1 OF 1
REV: B				

CUSTOMER COPY

