



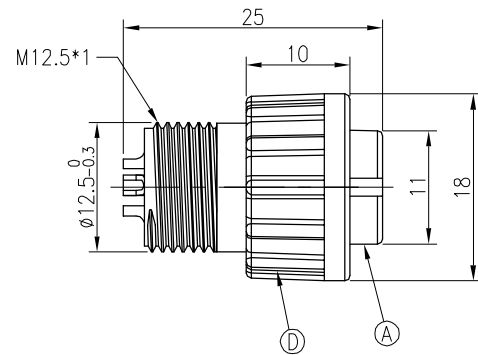



REV	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:A240902-2A	MF	2025.09.09



A-A SECTION

LOCK NUT & O-RING
PACKED AND SHIPPED
AS ATTACHMENTS



PIN ASSIGNMENTS
FRONT VIEW

NOTES:

- ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 5A
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS"
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **Q.P. PASS**

E	LIQUID GLUE	1	N/A	N/A
D	LOCK NUT	1	NYLON	BLACK
C	O-RING	1	EPDM	BLACK
B	FEMALE PIN	6	PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON	BLACK
NO.	DESCRIPTION	QT'Y	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Suzhou Singatron Auto Electronics Co., Ltd. 蘇州信音汽車電子有限公司		
DECIMALS:	ANGLES:	TITLE CIRCULAR STANDARD SIZE LOCK TYPE		
X :±0.5	X :±2°	DWN	MF	PART NO. 2CT3004-W06343H
X.X :±0.3	X.X :±1°	CHKD	ALLEN	SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	LIAO	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				