
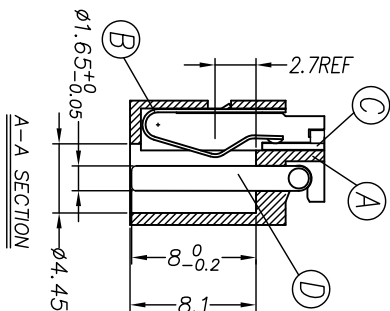
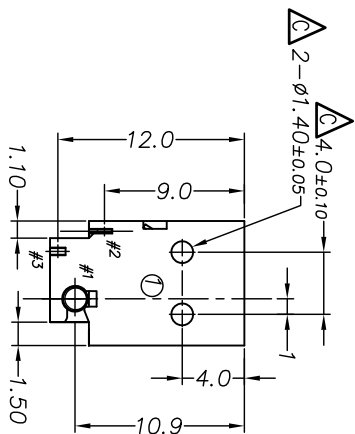

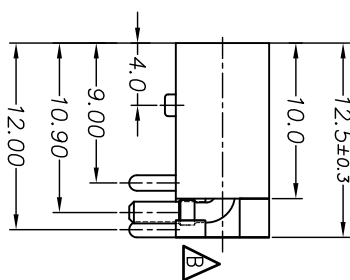
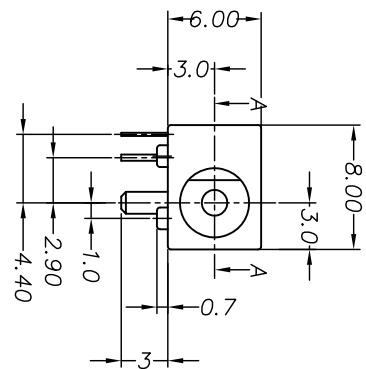
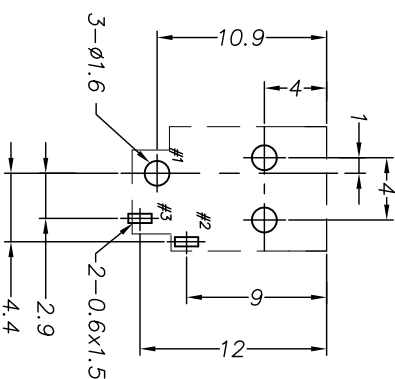


- NOTE:
- 1.RATING: DC 30V 2.5A
 - 2.DETAIL SPEC SEE " DC POWER JACK SPECIFICATIONS "
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - 4.GREEN PRODUCT IDENTIFICATION MARK ON JACK:
 - 5.GREEN PRODUCT IDENTIFICATION LABEL ON PACKING:
 - 6.FOR WEAVER SOLDERING LEAD-FREE PROCESS.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	ECN NO.C080243 DESIGN CHANGE	許海華	2/9/09
C	Modify tolerance ECN NO.C080289-4/6	許海華	5/21/09
D	取消印字 ECN NO.C090247	BILL	2010.03.29

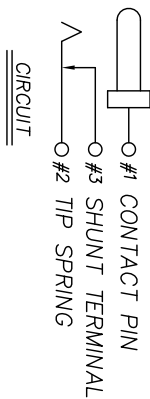

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

D	CONTACT PIN	1	GS5A	Ni60u "MIN,Cu80u "MIN
C	SHUNT TERMINAL	1	COOPER ALLOY 0.4t	Ag20u "MIN,Ni20u "MIN
B	TIP SPRING	1	COPPER ALLOY 0.2t	Ag20u "MIN,Ni20u "MIN
A	BODY	1	HIGH TEMP. THERMOPLASTICUL94V-0	YELLOW COLOR (123C)
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X : ±0.5	X : ±2°			
XX : ±0.3	XX : ±1°			
XXX : ±0.2				
TITLE		DC POWER JACK		
DWN	BILL 2010.03.29	PART NO. 2DC-0018-008		
CHKD	WUYUAN 2010.03.29	SCALE 3:1 UNIT: mm		
APVD	ROBIN 2010.03.29	SIZE: A4 SHEET: 10F1 REV: D		
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信音企業股份有限公司