

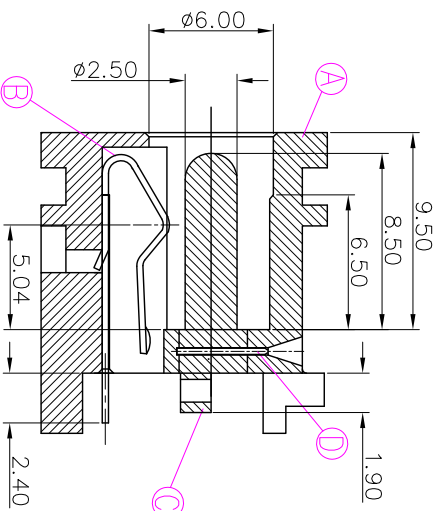







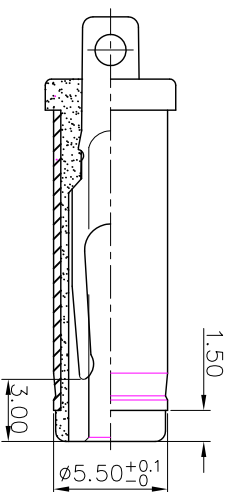


SECTION: A - A

- SPECIFICATIONS:
- 1.RATING: DC 15V 9A
 - 2.INSERTION FORCE: 0.5~5.5kgf.
 - 3.INSULATION RESISTANCE BETWEEN ANY ADJACENT TERMINALS SHALL NOT BE LESS THAN 100 MEGOHMS BY 500 VOLTS MEGGER.
 - 4.JACK SHALL WITHSTAND 500 VOLTS BETWEEN ANY ADJACENT TERMINAL FOR ONE MINUTE.
 - 5.CONTACT RESISTANCE SHALL NOT EXCEED 30mΩ.
 - 6.JACK SHALL WITHSTAND 5,000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AND CONTACT RESISTANCE SHALL NOT EXCEED 100mΩ.
 - 7.MEASURING CONDITION:
TEMPERATURE: FROM 5°C TO 35°C.
RELATIVE HUMIDITY: FROM 40% TO 85%.
 8. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 9. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: 
 10. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
 - 11.FOR HAND SOLDERING LEAD-FREE PROCESS.
 - 12.PRINTED DATE CODE "YMMDD" ON TOP OF CONNECTOR.

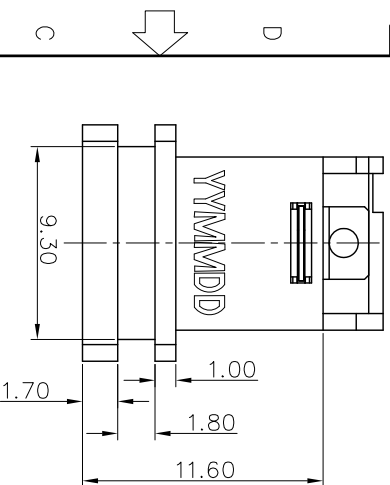

MATING PLUG ø5.50

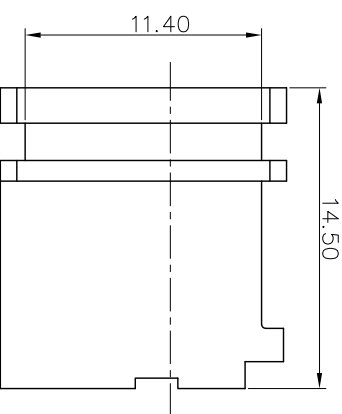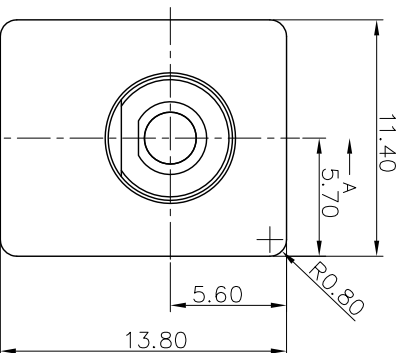

D	TERMINAL	1	STAINLESS STEEL 0.3t	N/A
C	CONTACT PIN	1	BRASS BAR	GOLD FLASH IN 40~80u"
B	TIP SPRING	1	COPPER ALLOY 0.3t	Ag 20u" IN 60u"
A	BODY	1	PA10T+30%GF VICNYL	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES



DC POWER JACK

DECIMALS:	ANGLES:	TITLE
X :±0.5	X :±2°	DWN
X.X :±0.3	X.X :±1°	CHKD
X.XX :±0.2		APVD

CUSTOMER COPY