

1

2

3

4

5

6

7

8

F






E

D


C

B


A

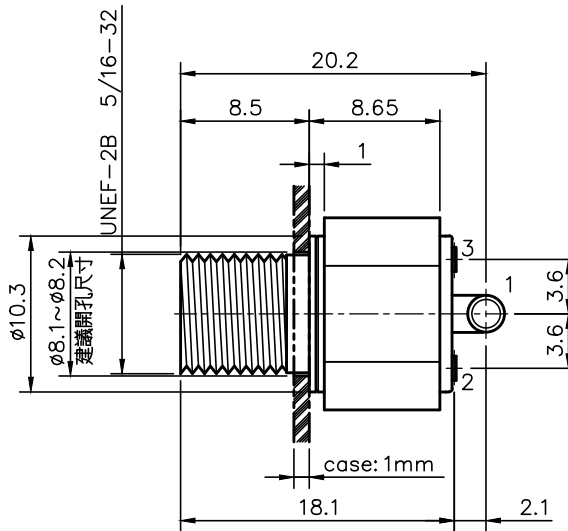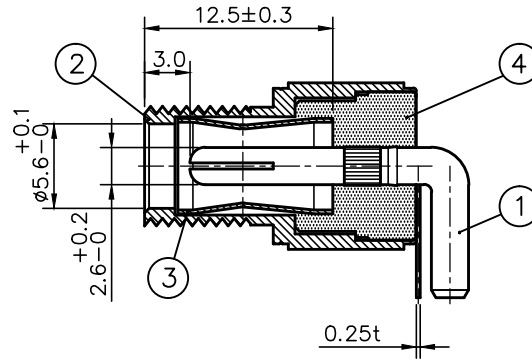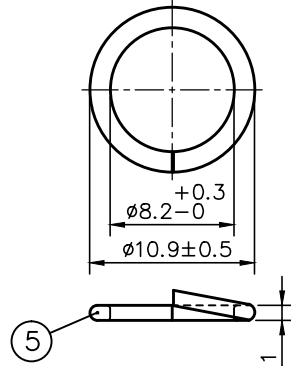

BOTTOM VIEW

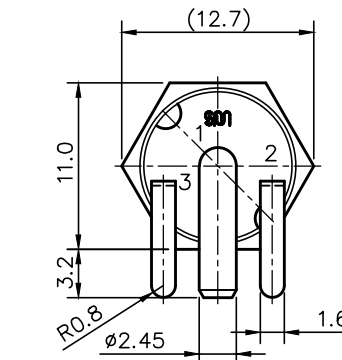

REAR VIEW

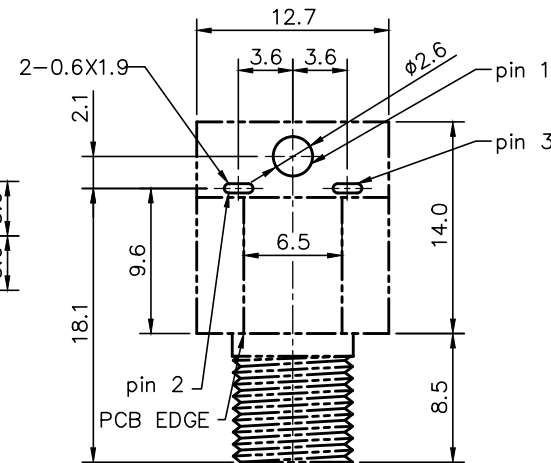


TOP VIEW

PCB LAYOUT

PIN 組立: 159-065

Follow RoHs Standard

- 1.Dielectric strength :AC 500V/1 minute.
- 2.Insulation resistance :100MΩ or over.(DC 500V)
- 3.Contact resistance :30mΩ or less.
- 4.Insertion force :3.5Kg Max
Extraction force :0.3~3Kg

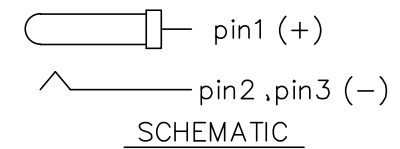

SCHEMATIC

DIMENSIONS RANGE	TOLERANCE UNLESS SPECIFIED
0.5<X<1	±0.1
1≤X≤6	±0.15
6<X≤18	±0.2
18<X≤50	±0.3

6	119-222	NUT	BRASS	NI	1
5	179-008	WASHER	SWRH62	NI	1
4	190-089	DIELECTRIC	PBT		1
3	170-236	Terminal	Phosphor Bronze	AG	1
2	119-212	SLEEVE	BRASS	NI	1
1	172-014	PIN	Phosphor Bronze	AG	1
ITEM	DRAWING NUMBER	PART NAME	MATERIAL	PLATED	Q'TY

Singatron Enterprise Co., Ltd.

TITLE	5.5X2.5DC JACK UNEF-2B 5/16-32
DWN	CHIFN PART NO. 2DC-0655-308
CHKD	2017.12.19
APVD	SCALE 1:1
	UNIT: mm
	SIZE: A3
	SHEET:1 OF 1
	REV:

CUSTOMER COPY