



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
D	ECN:C110263 Update Drawing	Longjiang	2011.08.23
E	ECN:C110345-4 MODIFY DIMENSION	Haijin	2012.01.04
F	ECN NO:S160101-R	YUREN	2016.06.30

SPECIFICATIONS:








- 1.RATING: DC 20V 5.5A
- 2.INSERTION FORCE: 0.4Kg~3.0Kg
WITHDRAWAL FORCE: 0.4Kg~3.0Kg
- 3.INSULATION RESISTANCE BETWEEN ANY ADJACENT TERMINALS SHALL NOT BE LESS THAN 100 MEGOHMS BY 500 VOLTS MEGGER.
- 4.JACK SHALL WITHSTAND 500 VOLTS BETWEEN ANY ADJACENT TERMINAL FOR ONE MINUTE.
- 5.CONTACT RESISTANCE SHALL NOT EXCEED 0.03 OHMS.
- 6.JACK SHALL WITHSTAND 5,000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AND CONTACT RESISTANCE SHALL NOT EXCEED 0.06 OHMS.
- 7.MEASURING CONDITION:
TEMPERATURE: FROM 5°C TO 35°C.
RELATIVE HUMIDITY: FROM 40% TO 85%.
- 8.PACKING: TAPE&REEL
- 9.TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
- 10.GREEN PRODUCT IDENTIFICATION MARK ON JACK:
- 11.GREEN PRODUCT IDENTIFICATION LABEL ON PACKING: **G.P. PASS**
- 12.FOR LEAD-FREE PROCESS.
- 13.PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.



CIRCUIT



G	GROUNDING SPRING	1	SUS 0.1t	
F	SHIELDING	1	SPCC 0.3t	可焊NI
E	TERMINAL	1	COPPER ALLOY 0.3t	SILVER PLATING
D	CONTACT PIN	1	BRASS Ø1.65	NICKEL PLATING
C	SHUNT	1	BRASS 0.3t	SILVER PLATING
B	TIP SPRING	1	COPPER ALLOY 0.3t	SILVER PLATING
A	BODY	1	NYLON-10T+30% GF	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:		ANGLES:	TITLE SHELL	
X	:±0.5	X	:±2°	DWN YUREN PART NO. 2DC-G328-B02
X.X	:±0.3	X.X	:±1°	CHKD CERRY SCALE 1:1 UNIT: mm
X.XX	:±0.2			APVD LIAO SIZE: A3 SHEET: 10F1 REV: F
CUSTOMER COPY				

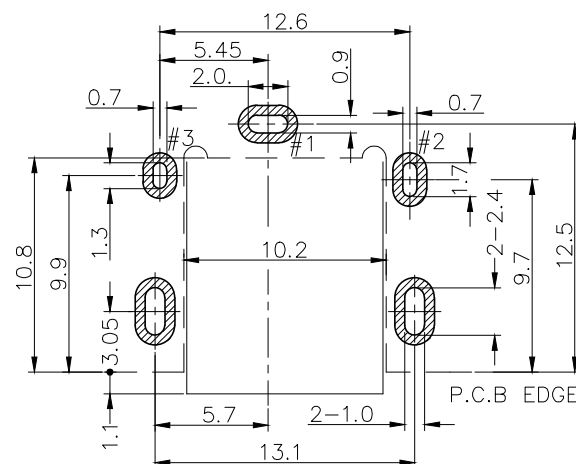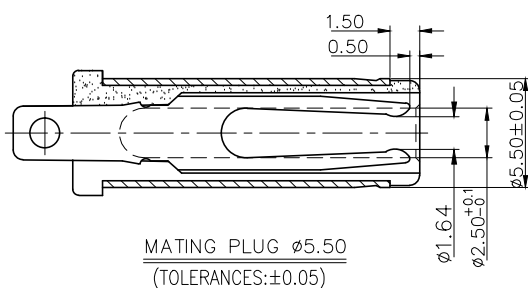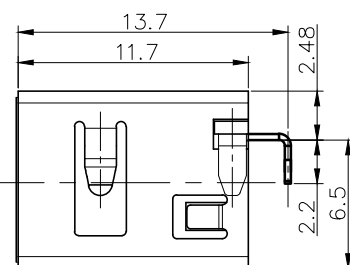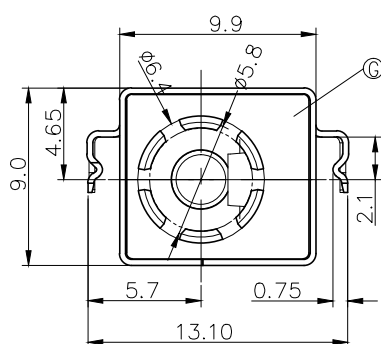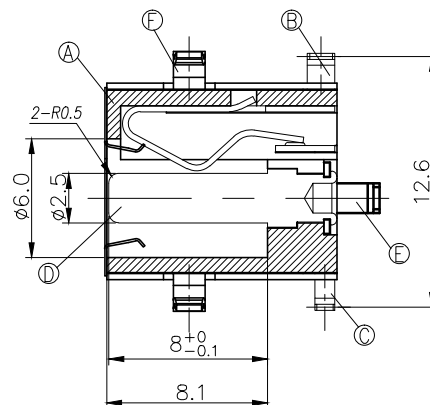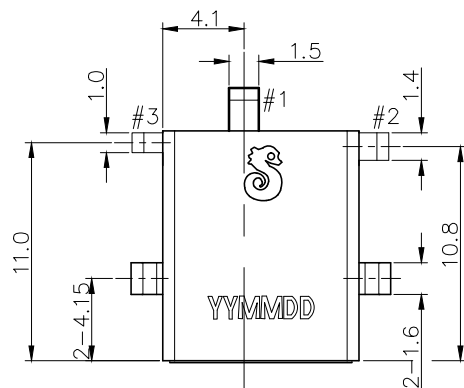

RECOMMENDED P.C.B LAYOUT
TOP VIEW Tolerance:±0.05