


REV	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR No.1080307-1A	Bill	2008.03.25
B	ECN NO.5120435	SEAN	2012.08.22



- SPECIFICATIONS:
- 1.RATING: DC 20V 7A
 - 2.INSERTION FORCE: 2.5 KgF Max
 - 3.WITHDRAWAL FORCE: 1.5KgF-2.5kgF
 - 3.INSULATION RESISTANCE BETWEEN ANY ADJACENT TERMINALS SHALL NOT BE LESS THAN 100 MEGOHMS BY 500 VOLTS MEGGER
 - 4.JACK SHALL WITHSTAND 250 VOLTS BETWEEN ANY ADJACENT TERMINAL FOR ONE MINUTE.
 - 5.CONTACT RESISTANCE SHALL NOT EXCEED 15mΩ
 - 6.JACK SHALL WITHSTAND 5,000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG,AND CONTACT RESISTANCE SHALL NOT EXCEED 15mΩ
 - 7.MEASURING CONDITION:
 - TEMPERATURE: FROM 5°C TO 35°C.
 - RELATIVE HUMIDITY: FROM 40% TO 85%
 - 8.TO CONFORM TO THE SINGATRON HSF SPECIFICATION
 - 9.GREEN PRODUCT IDENTIFICATION MARK ON JACK:
 - 10.GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - 11.FOR LEAD FREE PROCESS.
 - 12.PRINTED DATE CODE "YYMMDD" ON TOP OF CONNECTOR.

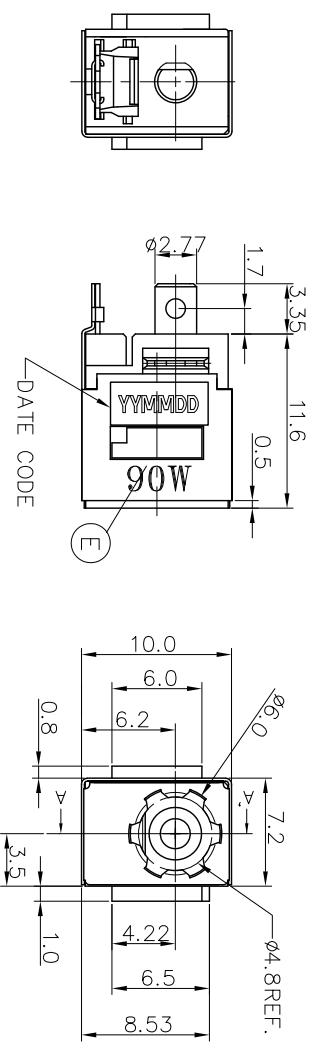