
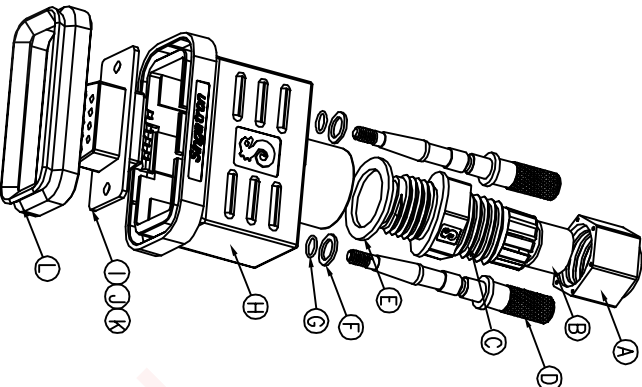





REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S120207	-5A	ULY	2012.03.12
B	ECN NO.S130725		YF	2014.08.13
C	ECN NO.S141055		JF	2015.01.23

文員
DCC(SZ)
陳環環
2015/01/28

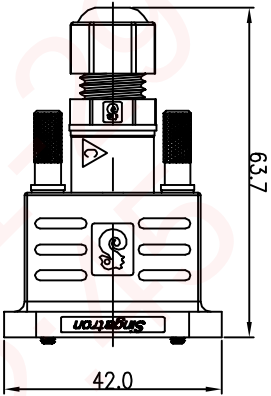

PACKAGING

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. ELECTRICAL CHARACTERISTICS:
3-1. CONTACT RESISTANCE : 10 mΩ MAX.
3-2. HI-POT TEST 1000VAC 5mA(1min)
3-3. INSULATION RESISTANCE: 100MΩohm MIN. BY 500V DC
 4. TEMPERATURE RATING : -20℃ ~ +80℃
 5. SPECIFICATIONS:SEE "D-SUB SERIES SPECIFICATIONS".
 6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE. FREE SPEC.
 7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 8. FOR CABLE OD:φ4.0mm~φ6.5mm

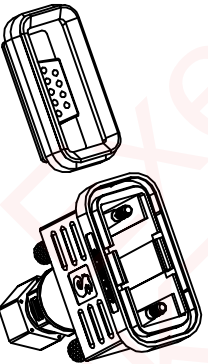

L	GASKET	1	EPDM	BLACK
K	FEMALE PIN	9	Brass	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	INSULATOR	2	PBT	BLACK
I	SHELL	2	COLD ROLLER STEEL	NICKEL PLATING 60u"
H	HOUSING	1	ABS UL94V-0	BLACK
G	O-RING 3	2	SILICONE	CLEAR
F	O-RING 2	2	EPDM	BLACK
E	O-RING 1	1	SILICONE	BLACK
D	SCREW	2	HB59-1.5B	NICKEL PLATING 100u"
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
XX	:±0.3	XX	:±1°	
XXX	:±0.2			
TITLE: D-Sub (IP67) FEMALE CONN. FEMALE 9 PIN SCREW TYPE				
DWN	JF	PART NO.	2DS3000-W09300H	
CHKD	Harden	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A3	SHEET: 1 OF 1	REV: C

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信昌企業股份有限公司