


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO:161124-12A	Yang	2017.03.01	

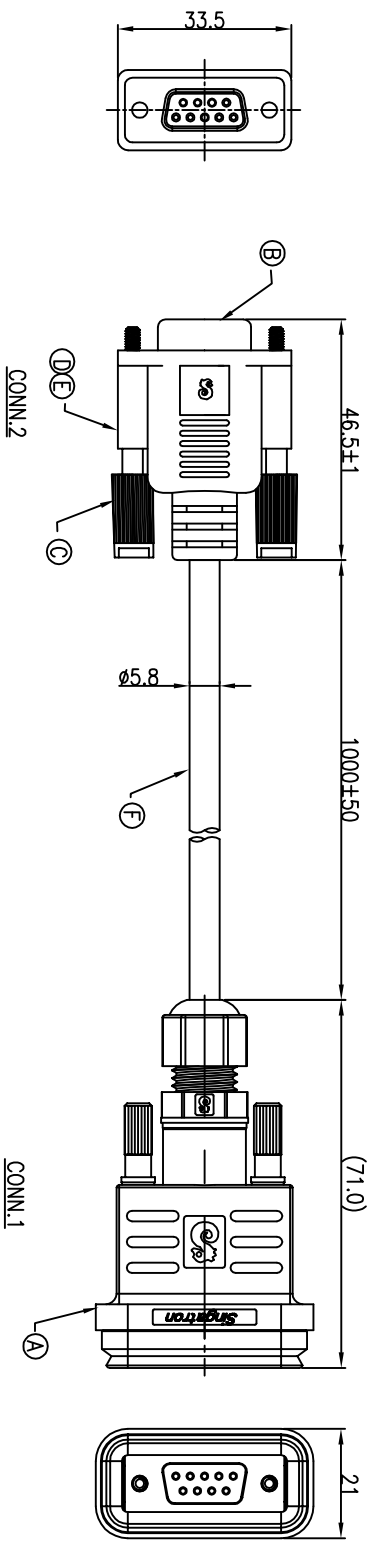

- NOTES:
1. CONN.1 WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 2A
 3. TEMPERATURE RATING : -20°C ~ +80°C
 4. SPECIFICATIONS:SEE "D-SUB SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:GR. PASS

CONN.1/2

Pin Assignments

Front View

9	PINK	9
8	WHITE	8
7	GRAY	7
6	BLUE	6
5	GREEN	5
4	YELLOW	4
3	RED	3
2	BROWN	2
1	BLACK	1
CONN.2	WIRE COLOR	CONN.1
PIN OUT		

F	CABLE	1	UL2464 24#*9C+AL 005.8 UV	BLACK(PVC JACKET)
E	INNER MOLD	1	LD-PE	NATURE
D	OVER MOLD	1	PVC(60P)	BLACK
C	SCREW	2	AG4*23.5 #4-40	NICKEL PLATED
B	CONNECTOR	1	D-SUB 9PIN FEMALE	BLACK
A	D-SUB FEMALE 9 PIN	1	D-SUB ASSEMBLY	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
 Singapore Enterprise Co., Ltd. 信晉企業股份有限公司				
TITLE D-Sub (IP67) FEMALE CONN. FEMALE 9 PIN SCREW TYPE				
DWN	Yang	PART NO.2DS3000-W09309H		
CHKD	Harlen	SCALE 1:1	UNIT: mm	
APVD	Steve	SIZE: A3	SHEET:1 OF 1	REV:A
CUSTOMER COPY				

CUSTOMER COPY