

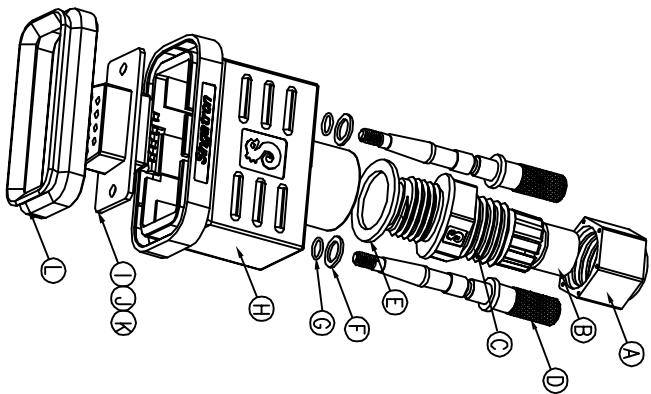




REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T220512-1A	JAY	2024.07.31	

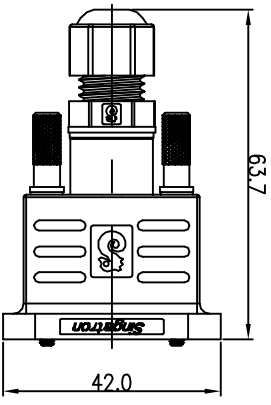

PACKAGING

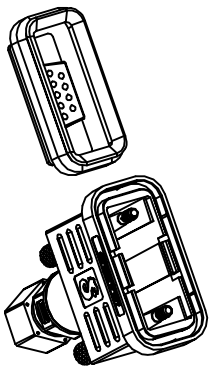

- NOTES:
1. WATERPROOF GRADE: IP67
IP67: IMMersed IN 1M OF WATER FOR 30 MINUTES
 2. CURRENT RATING: 3A
 3. ELECTRICAL CHARACTERISTICS:
3-1. CONTACT RESISTANCE: 25 mΩ Max.
3-2. HI-POT TEST 1000VAC 5mA(1Min)
3-3. INSULATION RESISTANCE: 100MΩ Min. MEASURED BY 500V DC
 4. TEMPERATURE RATING : -20℃ ~ +80℃
 5. SPECIFICATIONS:SEE "D-SUB SERIES SPECIFICATIONS".
 6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE. FREE SPEC.
 7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **60% PLAS**
 8. FOR CABLE OD:φ4.0mm~φ6.5mm

L	GASKET	1	EPDM	BLACK
K	FEMALE PIN	9	Brass	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	INSULATOR	2	PBT	BLACK
I	SHELL	2	COLD ROLLER STEEL	NICKEL PLATING 60u"
H	HOUSING	1	ABS UL94V-0	BLACK
G	O-RING 3	2	SILICONE	CLEAR
F	O-RING 2	2	EPDM	BLACK
E	O-RING 1	1	SILICONE	BLACK
D	SCREW	2	C3604	NICKEL PLATING 100u"
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司				
TITLE D-SUB (IP67) FEMALE CONN. FEMALE 9 PIN SCREW TYPE				
DWN	JAY	PART NO.	2DS3000-W093U0H	
CHKD	MF	SCALE 1:1	UNIT: mm	
APVD	JF	SIZE: A3	SHEET:1 OF 1	REV: A

CUSTOMER COPY