
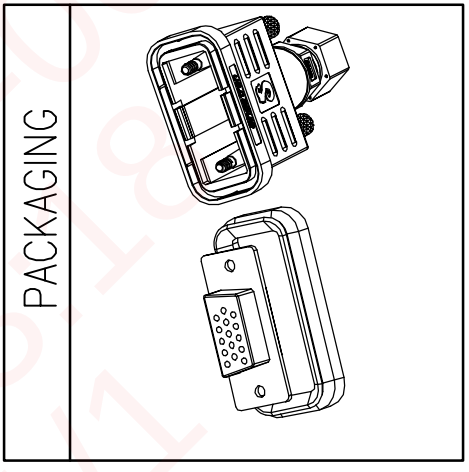

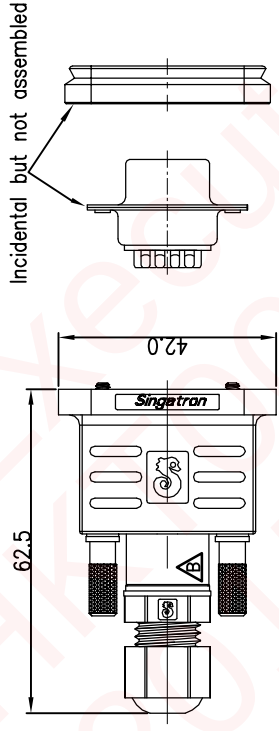


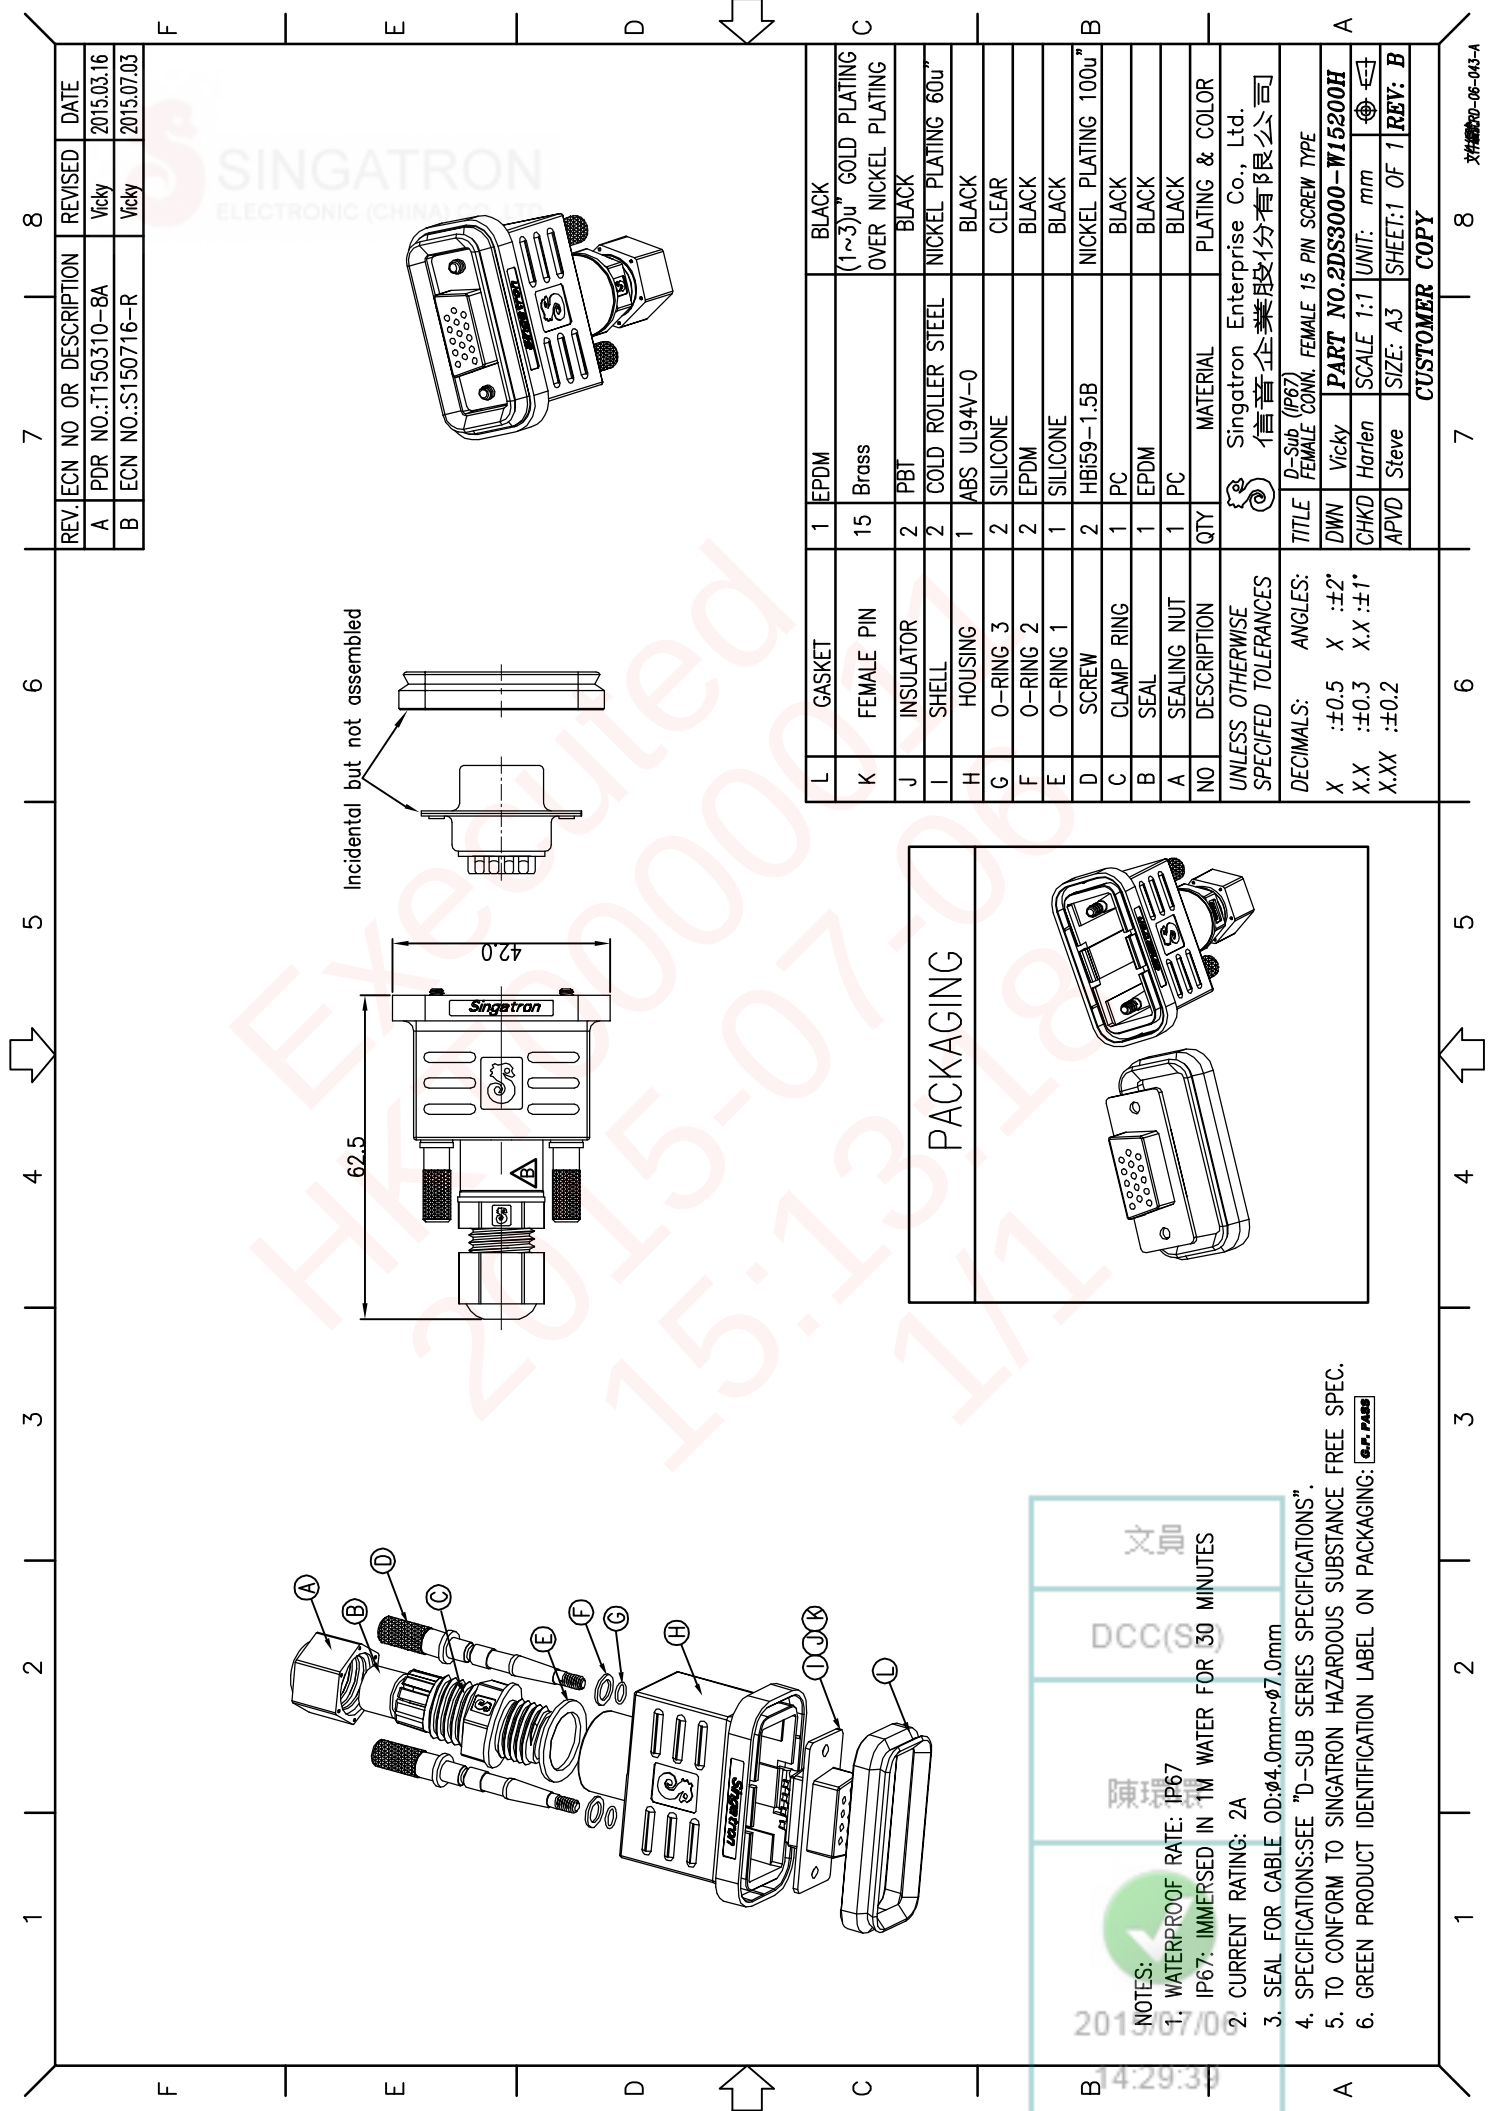

PACKAGING

2015/07/06 14:29:39

陳環

DCC(S)

文員

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 2A
 3. SEAL FOR CABLE OD: $\phi 4.0\text{mm} \sim \phi 7.0\text{mm}$
 4. SPECIFICATIONS: SEE "D-SUB SERIES SPECIFICATIONS".
 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **(GREEN PASS)**

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T150310-8A	Vicky	2015.03.16
B	ECN NO.:S150716-R	Vicky	2015.07.03

L	GASKET	1	EPDM	BLACK
K	FEMALE PIN	15	Brass	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	INSULATOR	2	PBT	BLACK
I	SHELL	2	COLD ROLLER STEEL	NICKEL PLATING 60u"
H	HOUSING	1	ABS UL94V-0	BLACK
G	O-RING 3	2	SILICONE	CLEAR
F	O-RING 2	2	EPDM	BLACK
E	O-RING 1	1	SILICONE	BLACK
D	SCREW	2	HB159-1.5B	NICKEL PLATING 100u"
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	: ± 0.5	X	: $\pm 2^\circ$	
XX	: ± 0.3	XX	: $\pm 1^\circ$	
XXX	: ± 0.2			
TITLE: D-Sub (IP67) FEMALE CONN. FEMALE 15 PIN SCREW TYPE				
DWG: Vicky				
CHKD: Harlen				
APVD: Steve				
PART NO.: 2DS3000-W15200H				
SCALE: 1:1 UNIT: mm				
SIZE: A3 SHEET: 1 OF 1 REV: B				
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信實企業股份有限公司