
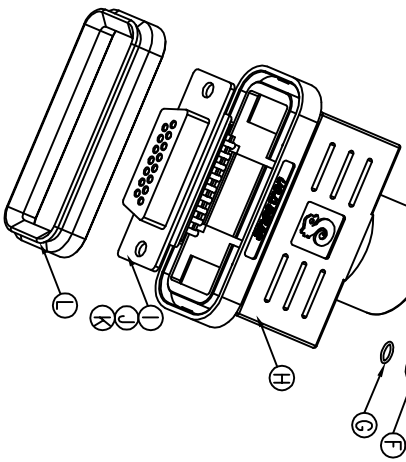


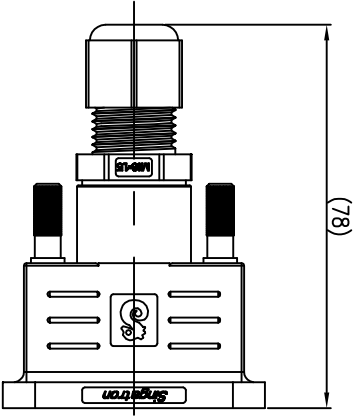



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	S160811-2A	Yang	2016.11.29

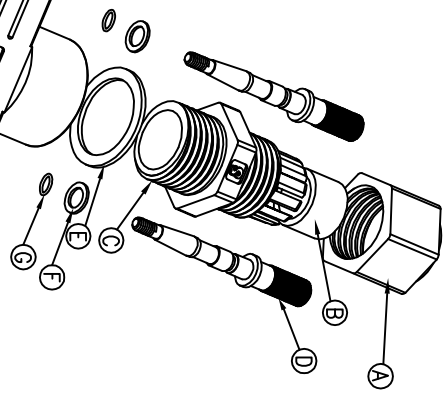

NOTES:

1. WATERPROOF RATE: IP67
- IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. CURRENT RATING: 5A
3. TEMPERATURE RATING : -20℃ ~ +80℃
4. SPECIFICATIONS:SEE "D-SUB SERIES SPECIFICATIONS".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:G.P. PASS
7. FOR CABLE OD:φ6.0mm~φ9.0mm

PACKAGING

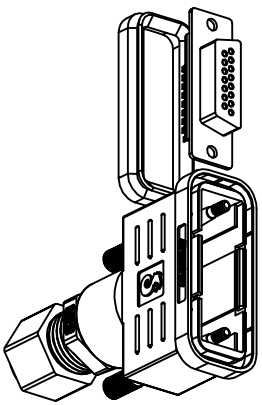

L	GASKET	1	EPDM	BLACK
K	FEMALE PIN	15	Phosphor Bronze	GOLD PLATING OVER NICKEL PLATING
J	INSULATOR	2	PBT	BLACK
I	SHELL	2	COLD ROLLER STEEL	NICKEL PLATING 60u"
H	HOUSING	1	ABS	BLACK
G	O-RING 3	2	SILICONE	CLEAR
F	O-RING 2	2	EPDM	BLACK
E	O-RING 1	1	SILICONE	GRAY
D	SCREW	2	HB159	NICKEL PLATING 100u"
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

 Singatron Enterprise Co., Ltd.
信晉企業股份有限公司

DECIMALS:	ANGLES:	TITLE	D-Sub (IP67) FEMALE CONN. FEMALE 15 PIN SCREW TYPE		
X :±0.5	X :±2°	DMN	Yang	PART NO.	2DS3000-W15300H
XX :±0.3	XX :±1°	CHKD	Horien	SCALE 1:1	UNIT: mm
XX :±0.2		APVD	Steve	SIZE: A3	SHEET:1 OF 1 REV:A

CUSTOMER COPY