

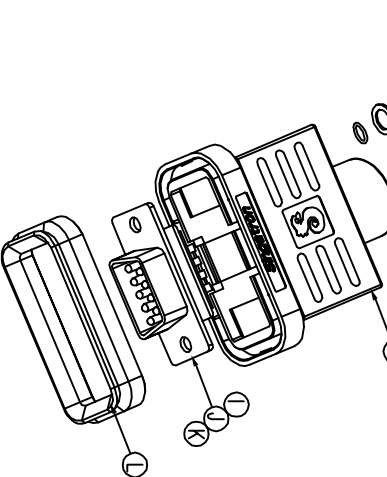
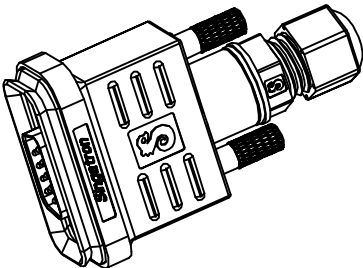

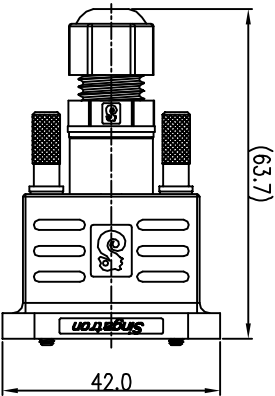


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.J220512-1B	JAY	2024.07.31

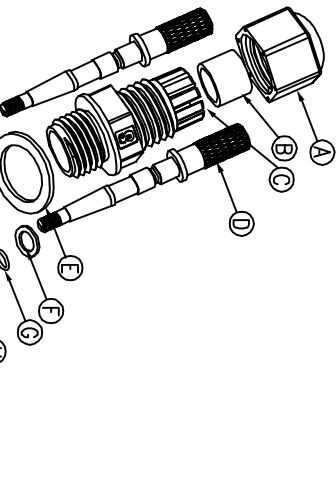

- NOTES:
1. WATERPROOF GRADE: IP67
IP67: IMMersed IN 1M OF WATER FOR 30 MINUTES
 2. CURRENT RATING: 3A
 3. ELECTRICAL CHARACTERISTICS:
3-1. CONTACT RESISTANCE : 25 mΩ MAX.
3-2. HI-POT TEST 1000VAC 5mA(1min)
3-3. INSULATION RESISTANCE: 100 MΩ MIN. BY 500V DC
 4. TEMPERATURE RATING : -20℃ ~ +80℃
 5. SPECIFICATIONS:SEE "D-SUB SERIES SPECIFICATIONS".
 6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 8. FOR CABLE OD:φ4.0mm~φ6.5mm

PACKAGING

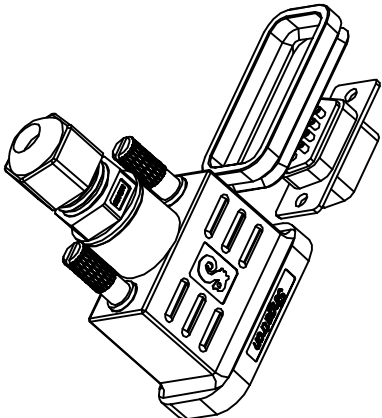

L	GASKET	1	EPDM	BLACK
K	MALE PIN	9	Brass(HB159-1.5B)	(1~3)u" GOLD PLATING OVER NICKEL PLATING
J	INSULATOR	2	PBT	BLACK
I	SHELL	2	COLD ROLLER STEEL	NICKEL PLATING 60u"
H	HOUSING	1	ABS 765A UL94V-0	BLACK
G	O-RING 3	2	SILICONE	CLEAR
F	O-RING 2	2	EPDM	BLACK
E	GASKET	1	EPDM	BLACK
D	SCREW	2	C3604	NICKEL PLATING 100u"
C	CLAMP RING	1	PC	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PC	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
 Suzhou Singatron Auto Electronics CO.,LTD. 蘇州信音汽車電子有限公司 D-Sub (IP67) MALE CONN. MALE 9 PIN SCREW TYPE DWN JAY CHKD MF APVD JF SCALE 1:1 UNIT: mm SHEET:1 OF 1   PART NO.ZDS3001-W093U0H				
CUSTOMER COPY				

CUSTOMER COPY