


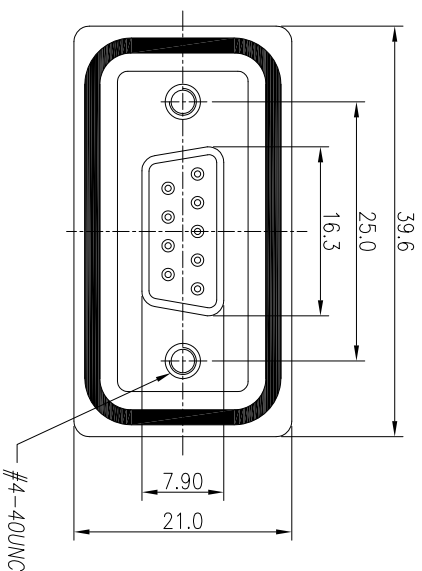
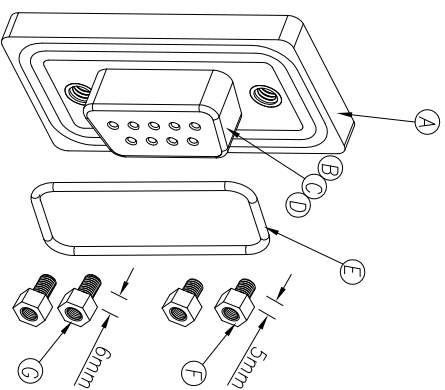


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110330-SI	Glen	2011.03.17
B	ECN NO.:S110705-2	Shown	2011.07.21




NOTES:

1. WATERPROOF RATE: IP68(WHEN PROPERLY MATED)
IP67: IMMersed IN 1M WATER FOR 24 HOURS
2. DO MATING TEST AFTER GLED
3. SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
4. VOLTAGE RATING: 120V AC.
5. DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V R.M.S
6. INSULATION RESISTANCE: 100 MEGOHMS MINIMUM,AT DC 500V.
7. CONTACT RESISTANCE: 25 MILLIOHMS MAXIMUM.
8. OPERATING TEMPERATURE: -40°C TO+105°C.
9. OTHER GENERAL SPEC. TO REFER "D-SUB SERIES SPEC".
10. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
11. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

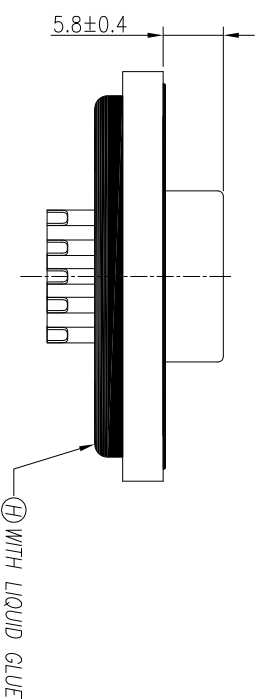

SCREW L=5.0 FOR PANEL THICKNESS UNDER 1.2mm
SCREW L=6.0 FOR PANEL THICKNESS BETWEEN 1.2~2.0mm



H	LIQUID GLUE	1	N/A	BLACK
G	SCREW	2	Brass	Ni Plated 80u
F	SCREW	2	Brass	Ni Plated 80u
E	O-RING	1	SILICONE	LIGHT BLUE
D	FEMALE PIN	9	Phosphor Bronze	GOLD PLATED
C	SHELL	2	COLD ROLLER STEEL	NI PLATED
B	INSULATOR	2	PBT	BLACK
A	D-SUB 9 PIN CORE	1	Nylon+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	SINGATRON Enterprise Co., Ltd. 信營企業股份有限公司		
X : ±0.5	X : ±2°	TITLE	D-SUB 9 PIN FEMALE CONN	
X.X : ±0.3	X.X : ±1°	DWN	Shown	PART NO.:2DS3002-W09300H
X.XX : ±0.2		CHKD	Steve	SCALE:2:1 UNIT: mm
		APVD	Tony	SIZE: A3 SHEET:1 OF 1 REV: B

CUSTOMER COPY