



REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T160811-1A	Yong		2016.12.02

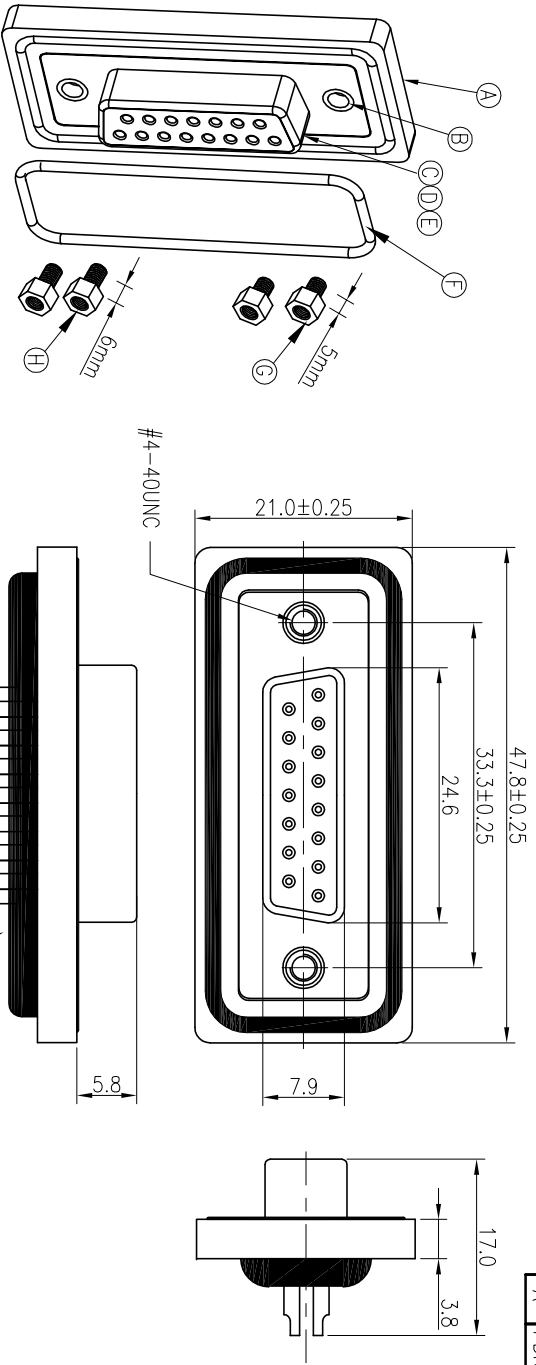

With Liquid Glue

- NOTES:
1. WATERPROOF RATE: IP68
IP67: IMMERSED IN 1M WATER FOR 24 HOURS
 2. DO MATING TEST AFTER GLUED
 3. SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 4. OPERATING TEMPERATURE: -40°C TO+105°C.
 5. OTHER GENERAL SPEC. TO REFER "D-SUB SERIES SPEC".
 6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

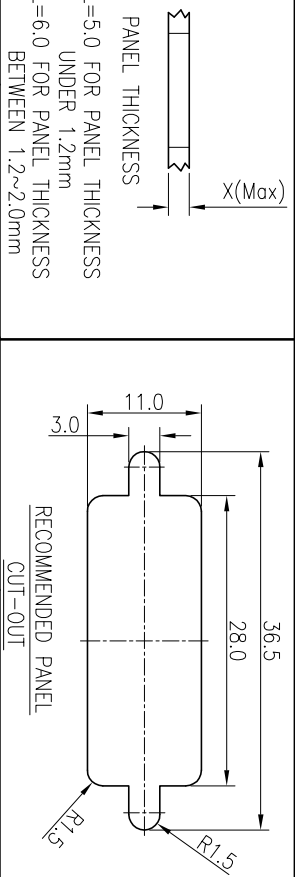

SCREW L=5.0 FOR PANEL THICKNESS UNDER 1.2mm
SCREW L=6.0 FOR PANEL THICKNESS BETWEEN 1.2~2.0mm

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	LIQUID GLUE	1	N/A	BLACK
H	SCREW	2	Brass	Ni Plated 50~80u"
G	SCREW	2	Brass	Ni Plated 50~80u"
F	O-RING	1	SILICONE	LIGHT BLUE
E	FEMALE PIN	15	Brass	GOLD PLATED
D	SHELL	2	COLD ROLLER STEEL	NI PLATED
C	INSULATOR	2	PBT	BLACK
B	RIVET	2	BRASS	NI PLATING 50~80u"
A	BODY	1	Nylon+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: D-SUB 15 PIN FEMALE CONN. FEMALE PIN FOR PANEL SOLDER TYPE				
DMN	Yong	PART NO.	2DS3002-W15300H	
CHKD	Harlen	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A2	SHEET: 1 OF 1	REV: A

CUSTOMER COPY