



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T141210-8A	JF	2016.04.01

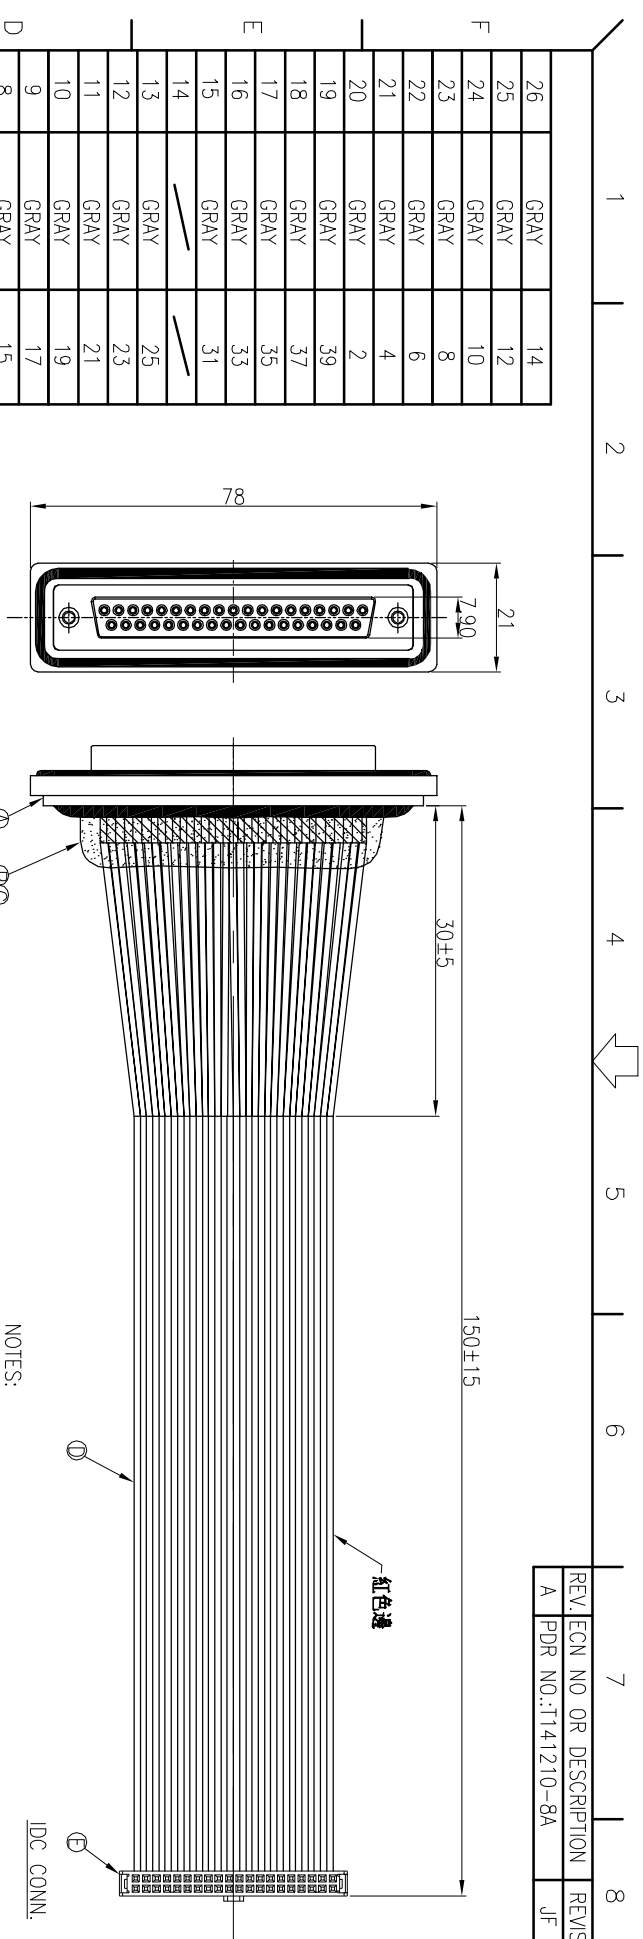


- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMersed IN 1M WATER FOR 30 MINUTES
 2. DO MATING TEST AFTER GLUED
 3. SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 4. OPERATING TEMPERATURE: -20°C TO +105°C.
 5. OTHER GENERAL SPEC. TO REFER "D-SUB SERIES SPEC".
 6. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

CONN.	WIRE COLOR	HOUSING
1	RED	1
2	GRAY	3
3	GRAY	5
4	GRAY	7
5	GRAY	9
6	GRAY	11
7	GRAY	13
8	GRAY	15
9	GRAY	17
10	GRAY	19
11	GRAY	21
12	GRAY	23
13	GRAY	25
14	GRAY	27
15	GRAY	29
16	GRAY	31
17	GRAY	33
18	GRAY	35
19	GRAY	37
20	GRAY	39
21	GRAY	41
22	GRAY	43
23	GRAY	45
24	GRAY	47
25	GRAY	49
26	GRAY	51

CONN.	WIRE COLOR	HOUSING
37	GRAY	40
38	GRAY	38
39	GRAY	36
40	GRAY	34
41	GRAY	32
42	GRAY	30
43	GRAY	28
44	GRAY	26
45	GRAY	24
46	GRAY	22
47	GRAY	20
48	GRAY	18
49	GRAY	16
50	GRAY	14
51	GRAY	12
52	GRAY	10
53	GRAY	8
54	GRAY	6
55	GRAY	4
56	GRAY	2
57	GRAY	1

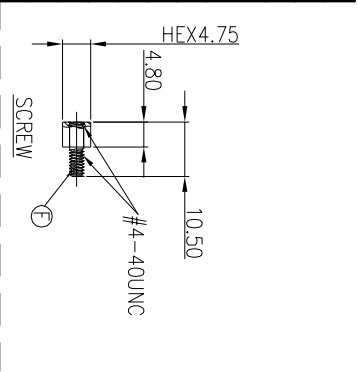

CONN.	WIRE COLOR	HOUSING
37	GRAY	40
38	GRAY	38
39	GRAY	36
40	GRAY	34
41	GRAY	32
42	GRAY	30
43	GRAY	28
44	GRAY	26
45	GRAY	24
46	GRAY	22
47	GRAY	20
48	GRAY	18
49	GRAY	16
50	GRAY	14
51	GRAY	12
52	GRAY	10
53	GRAY	8
54	GRAY	6
55	GRAY	4
56	GRAY	2
57	GRAY	1

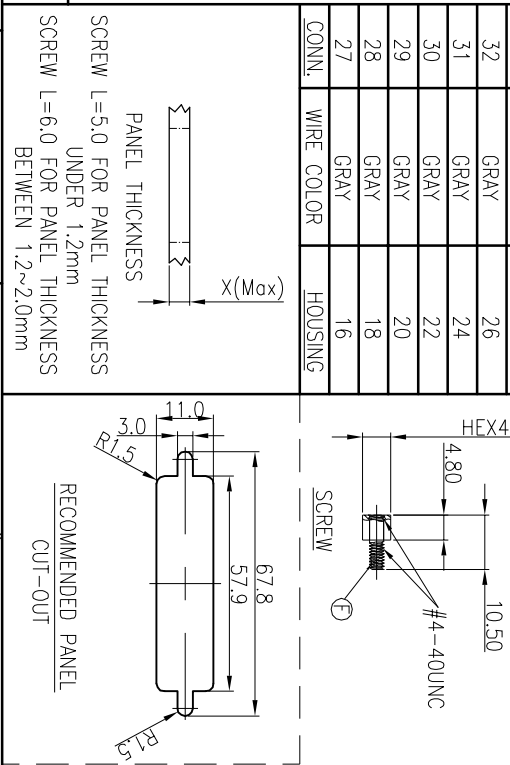

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	D-SUB 37 CONN.	1	N/A	BLACK
B	HEAT SHRINK TUBE	35	Ø1.5 125°C 300V	BLACK
C	UV GLUE	1	N/A	NATURAL
D	FLAT RIBBON CABLE	1	PH1.0	GRAY(PVC JACKET)
E	IDC CONN.	1	鍍金220pin /2.0	BLACK
F	SCREW	2	STAINLESS STEEL	N/A

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.3 X.X :±1°

X.XX :±0.2

TITLE: D-SUB 37 PIN FEMALE CONN. FEMALE PIN FOR SOLDER TYPE

DWN: JF

CHKD: Yang

APVD: Horlen

SCALE: 2:1

SHEET: 1 OF 1

REV: A

Singatron Enterprise Co., Ltd. 信貿企業股份有限公司

PART NO.:2DS3002-W37301IH

SIZE: A3

CUSTOMER COPY