

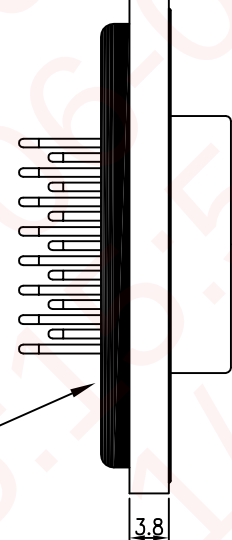
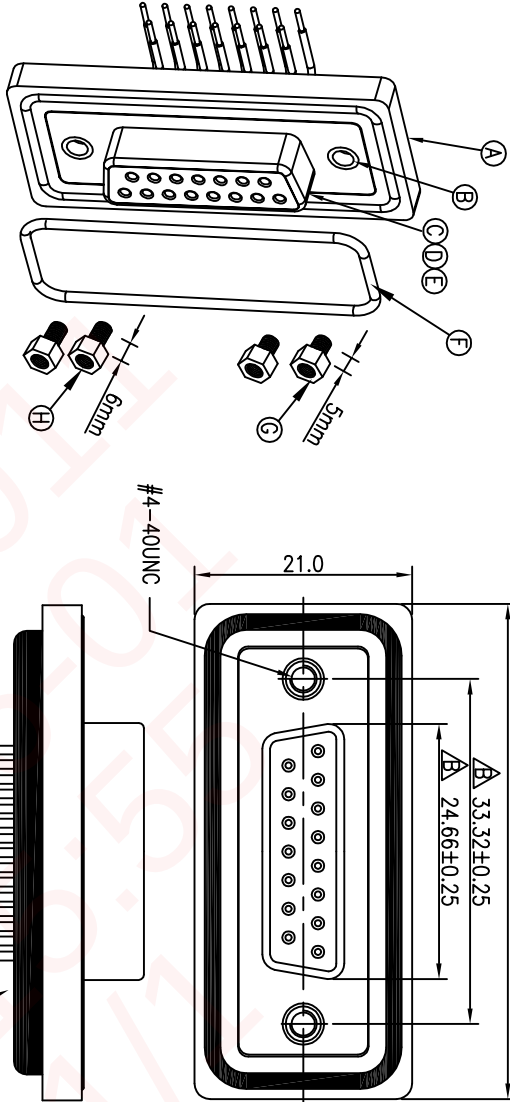



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T120613-7A	ULLY	2013.01.18
B	ECN NO.:S150554-R	Lin	2015.05.27

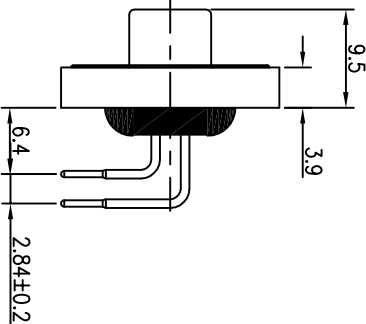


- NOTES:
1. WATERPROOF RATE: IP68
 2. DO MATING TEST AFTER GLUED
 3. SIGNAL CONTACT CURRENT RATING: 5.0 AMPS.
 4. VOLTAGE RATING: 120V AC.
 5. DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V R.M.S
 6. INSULATION RESISTANCE: 100 MEGOHMS MINIMUM AT DC 500V.
 7. CONTACT RESISTANCE: 25 MILLIOHMS MAXIMUM.
 8. OPERATING TEMPERATURE: -40°C TO +105°C.
 9. OTHER GENERAL SPEC. TO REFER "D-SUB SERIES SPEC".
 10. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 11. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

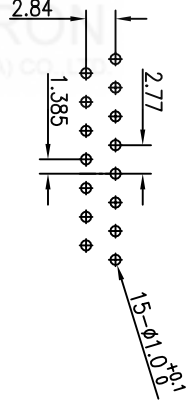

15 PIN FEMALE CONNECTOR
PCB PIN LAYOUT



SCREW L=5.0 FOR PANEL THICKNESS
UNDER 1.2mm
SCREW L=6.0 FOR PANEL THICKNESS
BETWEEN 1.2~2.0mm

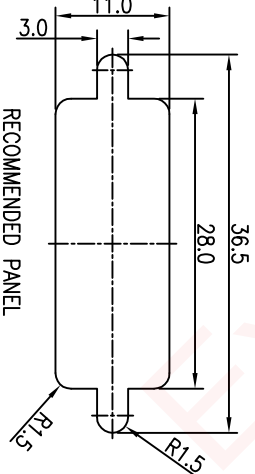

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	LIQUID GLUE	1	N/A	BLACK
H	SCREW	2	Brass	Ni Plated 50~80u"
G	SCREW	2	Brass	Ni Plated 50~80u"
F	O-RING	1	SILICONE	LIGHT BLUE
E	FEMALE PIN	15	Phosphor Bronze	GOLD PLATED
D	SHELL	2	COLD ROLLER STEEL	NI PLATED
C	INSULATOR	2	PBT	BLACK
B	RIVET	2	BRASS	NI PLATING 50~80u"
A	BODY	1	Nylon+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
XX	:±0.3	XX	:±1°	
XXX	:±0.2			
TITLE: D-SUB 15 PIN FEMALE CONN FEMALE PIN FOR PANEL PCB TYPE(NON-LOGO)				
DWN	LIN	PART NO.	2DS3004-W153A0H	
CHKD	Harlen	SCALE	1:1	UNIT: mm
APVD	Steve	SIZE: A2	SHEET: 1 OF 1	REV: B

CUSTOMER COPY

Singatron Enterprise Co., Ltd.
信昌企業股份有限公司