
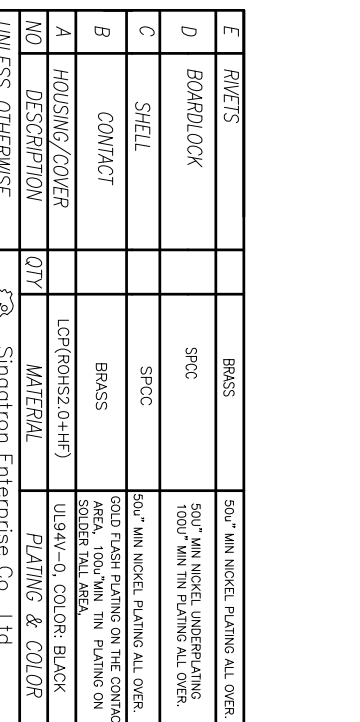


SPECIFICATIONS

- 1.1 VOLTAGE: 250 VAC(RMS) Max.
- 1.2 CURRENT RATING: 3 A
- 1.3 CONTACT RESISTANCE: 25 mohms Max.
- 1.4 INSULATION RESISTANCE: 1000 Mohms Min.
- 1.5 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(RMS)
- 1.6 MATING FORCE: 4.0 Kgf Max.
- 1.7 UNMATING FORCE: 1.0 Kgf Min.
- 1.8 OPERATING TEMPERATURE: -55°C to +85°C
- 1.9 GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING

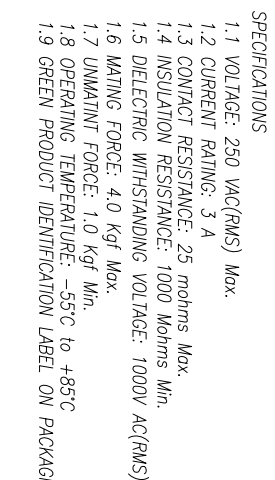

E	RIVETS			BRASS	50U" MIN NICKEL PLATING ALL OVER
D	BOARDLOCK			SPCC	50U" MIN NICKEL UNDERPLATING 100U" MIN TIN PLATING ALL OVER.
C	SHELL			SPCC	50U" MIN NICKEL PLATING ALL OVER.
B	CONTACT			BRASS	GOLD FLASH PLATING ON THE CONTACT AREA, 100U" MIN TIN PLATING ON SOLDER TAIL AREA.
A	HOUSING/COVER			LCF(RHHS2.0+HF)	U194V-0, COLOR: BLACK
NO	DESCRIPTION	QTY		MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES					
DECIMALS:		ANGLES:		 Singatone Enterprise Co., Ltd. 信音企業股份有限公司	
X : ±0.5	X : ±2°	TITLE	DR 9PIN PLUG	R/A DIP 8,08H	
X X : ±0.3	X X : ±1°	DWN	JIANGTOD	PART NO. ZDS3Y65-000111F	
X.XX : ±0.25		CHKD	ALLEN	SCALE 1:1	UNIT: mm
		APVD	BOYE	SIZE: A3	SHEET: 10F1 REV: A
CUSTOMER COPY					