
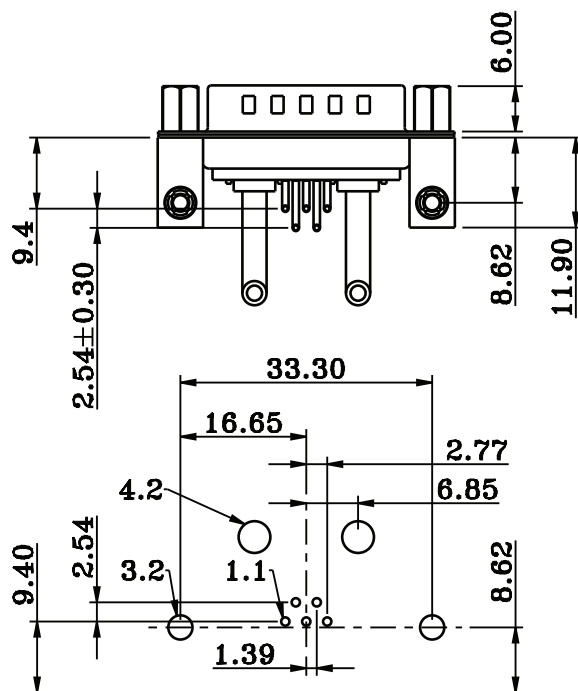
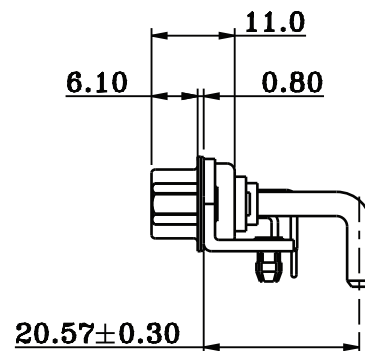


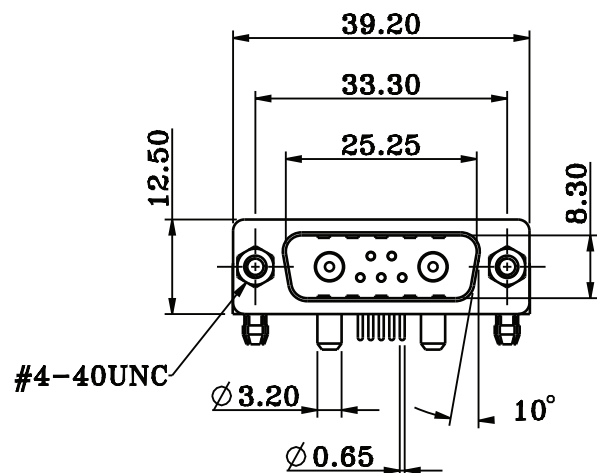

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT: COPPER ALLOY, FULL GOLD FLASH
HIGH POWER CONTACT: COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 30 A

HIGH POWER CONTACT RESISTANCE : 1.0 mΩ MAX.

SIGNAL CONTACT CURRENT RATING : 5.0 A

SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatron Enterprise Co., Ltd. 信音企業股份有限公司			
DECIMALS:	ANGLES:	TITLE	D-SUB		
X :±0.5	X :±2°	DWN	CHEN	PART NO. 2DSRP3000-7W2MTB1C-X	
X.X :±0.3	X.X :±1°	CHKD	HUA	SCALE 1:1	UNIT: mm
X.XX :±0.2		APVD	JORDAN	SIZE: A3	SHEET: 1 OF 1
CUSTOMER COPY					
REV: A					