

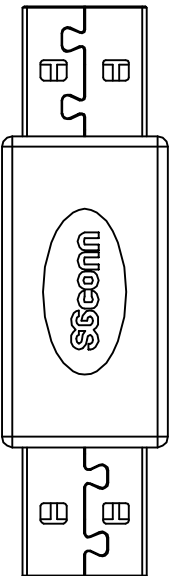

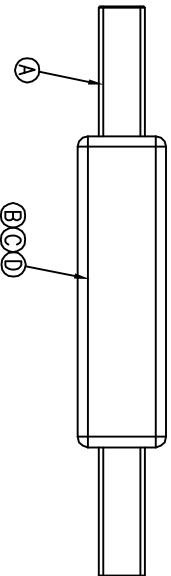



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: A231225-5A	JAY	2025.07.22

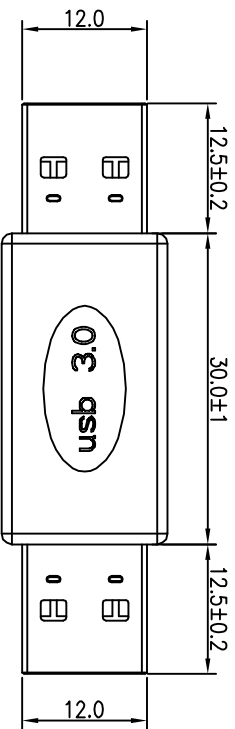

Pin Assignments
Front View

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: 30V 1A
- 1-2. CONTACT RESISTANCE: 30mohm Max.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100MOhm Min. MEASURED BY 500 VDC
2. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
3. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **RoHS Pass**

D	OVER MOLD	1	PVC	BLACK
C	INNER MOLD	1	PE	WHITE
B	PCB	1	FR-4	GREEN
A	USB CONN.	2	USB 3.0 PLUG	N/A
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES: TITLE USB DOUBLE-END PLUG

X :±0.5 X :±2° DWN JAY PART NO.20P3034-W09100H

X.X :±0.3 X.X :±1° CHKD ALLEN SCALE 1:1 UNIT: mm

X.XX :±0.2 X.XX :±0.2 APVD LAO SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY