
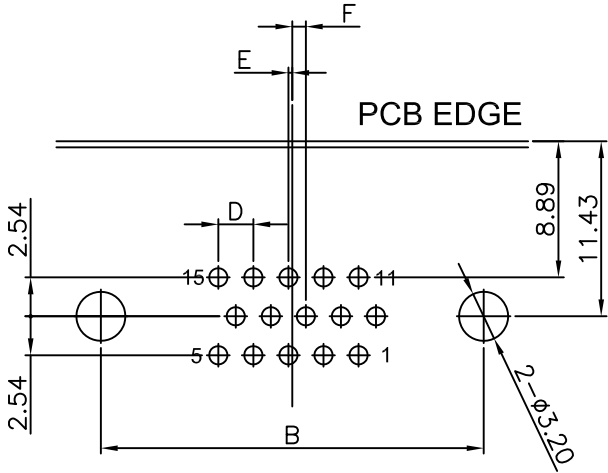
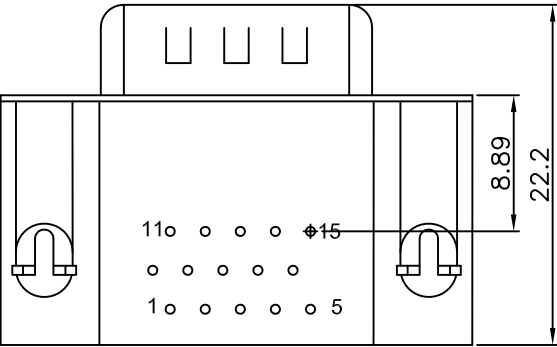


REV.	ECN.	DATE	DWN	APVD

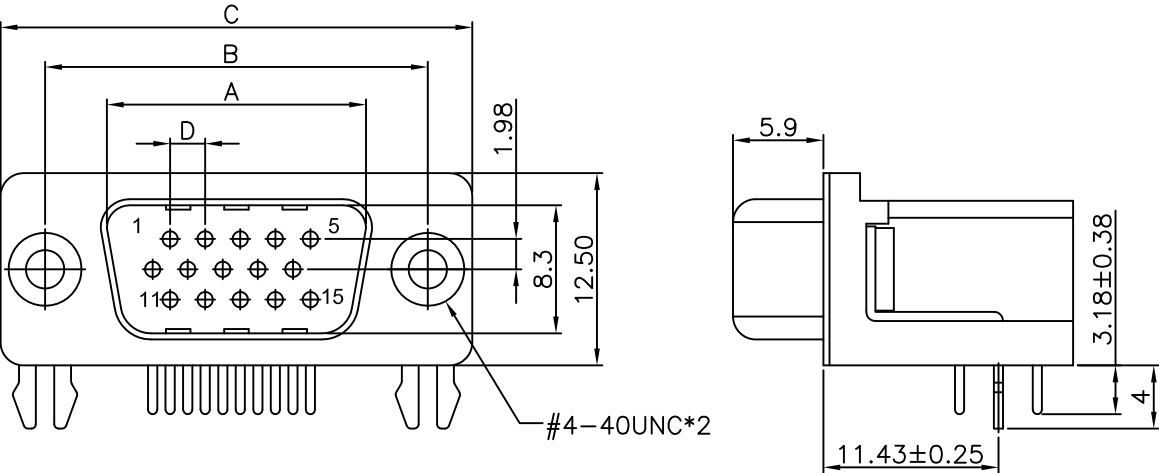

POSITION	A±0.20	B±0.20	C±0.38	D	E	F
15 pin	16.90	25.00	30.80	2.29	0.25	0.89
26 pin	25.25	33.30	39.20	2.29	0.51	0.64
44 pin	38.95	47.05	53.05	2.29	0.51	0.64
62 pin	55.40	63.50	69.40	2.41	0.58	0.62

MATERIAL:

INSULATOR : PBT+30% GLASS FIBER (UL 94V-0) .
CONTACT : COPPER ALLOY
CONTACT FINISH : GOLD OVER NICKEL
SHELL : STEEL ,NICKEL PLATED
BOARDLOCK : BRASS,TIN PLATED
RIVETED INSERT : BRASS,NICKEL PLATED

SPECIFICATION:

CURRENT RATING : 2 AMP
DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
CONTACT RESISTANCE : 15mΩ MAX.
OPERATING TEMPERATURE : -55°C ~ +105°C.

Order Information :

DRH - E 1 5 P - N - 0 0 1
1 2 3 4 5 6 7

1. SERIES NUMBER	DRH : HIGH DENSITY D-SUB 90° 8.89mm MOUNT
2. POSITION	E : 15 A : 26 B : 44 C : 62
3. POLARITY	P : MALE
4. MATING AND MOUNTING OPTIONS	N : 4-40 THREADED RIVETED W/BOARDLOCK NJ : BOARDLOCK AND JACK SCREWS ASSEMBLED SEE MOUNTING OPTION SHEET FOR OTHERS MOUNTING
5. PLATING	1 : SELECTIVE GOLD 4 : SELECTIVE 15u" GOLD 6 : SELECTIVE 30u" GOLD 0 : FULL GOLD © Standard : 0
6. INSULATOR COLOR	0 : BLACK
7. SHELL PLATING	1 : NICKEL

RoHS COMPLIANT

SINGATRON U. S. A.					GENERAL TOLERANCE X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05 ANGLE TOLERANCE ± 1° RADIUS ± 0.25 HOLE ± 0.13	DRAWN.	Peter	DATE	05-10-2005	DRAWING NO.	DH92-XX1XXXX00-R		W00001	
						CHECKED.	AMY	DATE	05-12-2005	TITLE. HIGH DENSITY D-SUB CONNECTORS PCB RIGHT ANGEL MALE FOOTPRINT : 8.89mm				
						APPROVED.	HENRY	DATE	05-13-2005	PART NO.	DRH-XXP-X-XX1		REV	A.0
SIZE A4	UNIT mm	SCALE. 2 / 1	SHEET. 1 OF 1											

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070321-01	07/03/28	TRACY	HENRY
A.2	ECN-071116-01	07/11/19	TRACY	HENRY

N

#4-40UNC

4-40 THREADED RIVETED W/BOARDLOCK

NJ

#4-40UNC

4-40 THREADED RIVETED W/BOARDLOCK AND JACK SCREWS

NH

#4-40UNC

RIVETED W/BOARDLOCK AND RIVETED HEX NUT

N4

#4-40UNC

4-40 THREADED RIVETED W/4 PRONG BOARDLOCK

H

#4-40UNC

4-40 THREADED RIVETED W/Ø3.2 THROUGH HOLE

X

#4-40UNC

BOARDLOCK AND JACK SCREWS ASSEMBLED

N/J

#4-40UNC

4-40 THREADED RIVETED W/BOARDLOCK AND JACK SCREWS UNASSEMBLED

SINGATRON U.S.A.					GENERAL TOLERANCE X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05 ANGLE TOLERANCE ± 1° RADIUS ± 0.25 HOLE ± 0.13	DRAWN. Peter	DATE 05 - 10 - 2005	DRAWING NO. C-DH0002		CUSTOMER DRAWING	
						CHECKED. HENRY	DATE 05 - 16 - 2005	TITLE. HIGH DENSITY D-SUB CONN. RIGHT ANGLE FOOTPRINT : 8.89mm			
SIZE A4	UNIT mm	SCALE. FREE	SHEET. 1 OF 1			APPROVED. HENRY	DATE 05 - 16 - 2005	PART NO. DRH-MOUNT		REV	A.2

SIZE A4	UNIT mm	SCALE. FREE	SHEET. 1 OF 1	
------------	------------	----------------	------------------	--