

1.27mm × 1.27mm (0.05" × 0.05") Female Header

Dual Row 06 to 100 Contacts
For 0.4mm Square Post Mating

0057D Series





APPLICATION AND FEATURES

1. Standoffs facilitate post solder cleaning.
2. Mates with P.C.Board connectors such as 0055D, 0081D, 0083D, 0093 & 0153D series.
3. RoHS compliant.

SPECIFICATIONS

Current Rating:	1 Amp
Insulator Resistance:	5000 Megohms min.
Dielectric Withstanding:	AC 600 V
Contact Resistance:	30m Ohms Max.
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	230°C for 30 seconds and 260°C for 5 seconds
Contact Material:	Copper Alloy
Insulator Material:	LCP, UL 94V-0

Recommended P.C.Board
Hole Layout

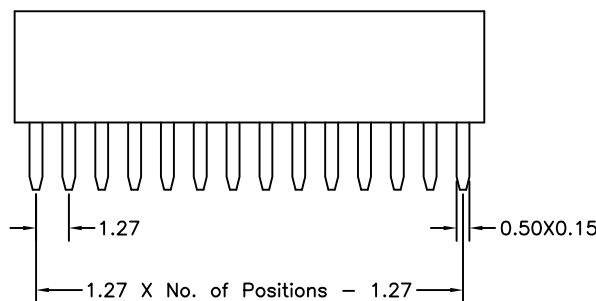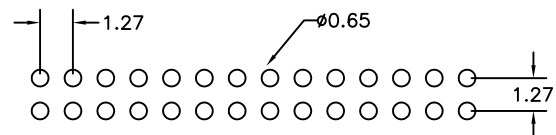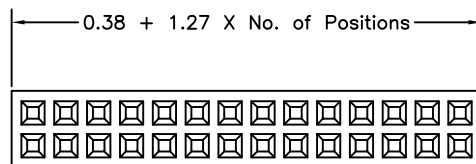

Tolerance: ±0.30mm

Order Information 0057D Series

Example: 0057D-20-S2-02

Series No.	Number of Contacts	Connector Type	Contact Plating
0057D	06 to 100 Contacts	Height : "H" 4.3mm Base	Tin Plated 01 Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30