

1.27mmX1.27mm (0.05"X0.05") Pin Header

Double Row
(Right Angle)


0073D-R2 Series

APPLICATION AND FEATURES




1. 0073D series headers are ideal for board stacking application.
2. Standoffs facilitate post soldering clean.
3. Suggestion mating with 0155C series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating:	1 Amp
Insulator resistance:	1000 Megohms min.
Contact Resistance:	20 Megohms Max.
Dielectric withstanding:	300V AC
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	230°C for 30 seconds and 260°C for 5 seconds
Contact Material:	Brass
Insulator Material:	LCP, UL 94V-0

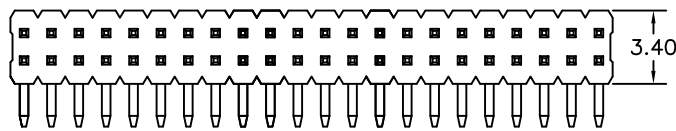

Recommended P.C.Board
Hole Layout

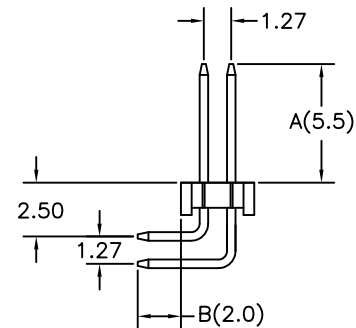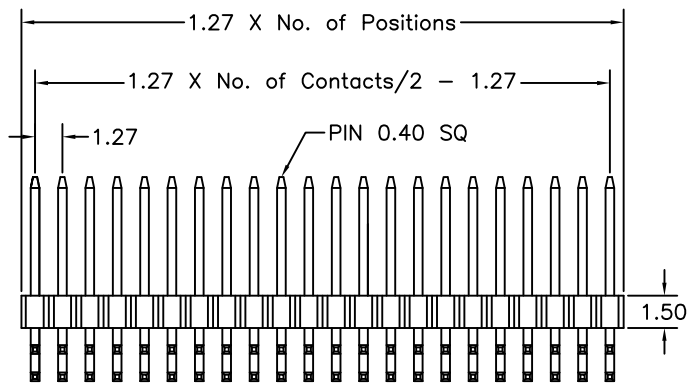

Tolerance: $\pm 0.30\text{mm}$

Order Information 0073D Series

Example: 0073D-16-R2-02-A/B-G

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
0073D	04 to 100 Contacts		Tin Plated 01	A B
			Gold Plated	5.5 2.0
			Flash 02	
			10 μ " 10	
			30 μ " 30	