

# 1.27mm X 1.27mm (0.05" X 0.05") Pin Header

Box Type  
(Dual Row)

0093 Series






## APPLICATION AND FEATURES

1. Standoffs facilitate post solder cleaning.
2. Mates with P.C.Board connectors such as 0057D & 0156 series.
3. RoHS compliant.

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator Resistance: 1000 Megohms min.  
 Dielectric Withstanding: AC 600 V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 230°C for 30 seconds and 260°C for 5 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Nylon-6T, UL 94V-0

Recommended P.C.Board Hole Layout

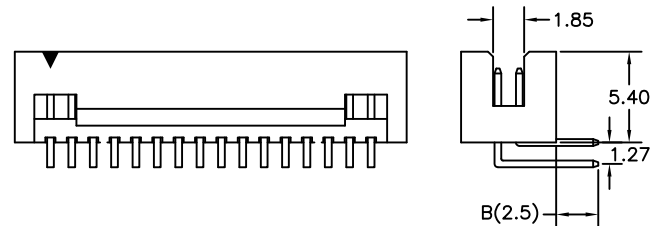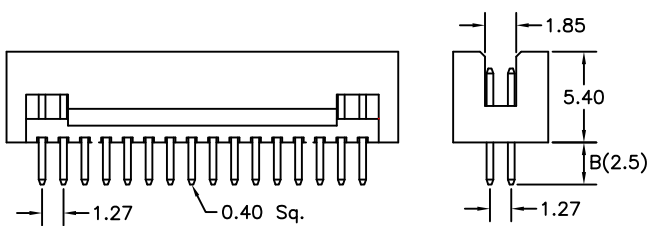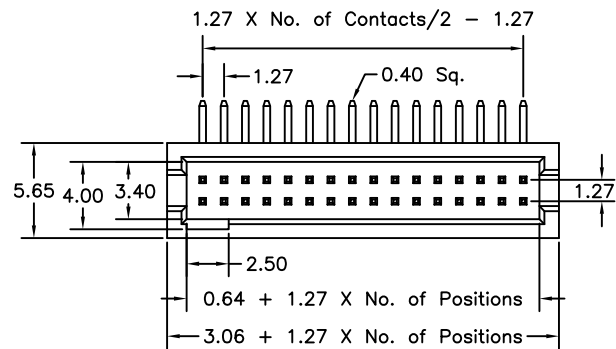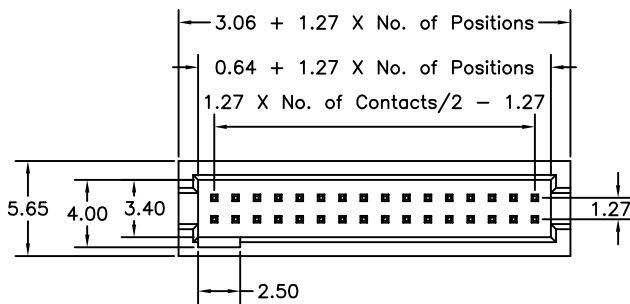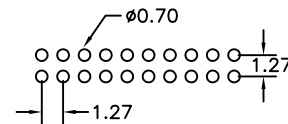

Tolerance: ±0.30mm

## Order Information 0093 Series

Example: 0093-50-S-02-B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
0093	10 to 100 Contacts	Straight S	Tin Plated 01	S-B R-B
		Right Angle R	Gold Plated	2.5 2.5
			Flash 02	
			10 μ" 10	
			30 μ" 30	