

# 1.27mm X 1.27mm (0.05" X 0.05") Pin Header

Box Type, Board Spacer  
(Dual Row)


0095 Series

## APPLICATION AND FEATURES

1. Variable pin length.
2. Standoffs facilitate post solder cleaning.
3. Mates with P.C.Board connectors such as 0057D & 0156 series.
4. RoHS compliant.

## SPECIFICATIONS

Current Rating:	1 Amp
Insulator Resistance:	1000 Megohms min.
Dielectric Withstanding:	AC 600 V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	230°C for 30 seconds and 260°C for 5 seconds
Contact Material:	Copper Alloy
Insulator Material:	Nylon-6T, UL 94V-0

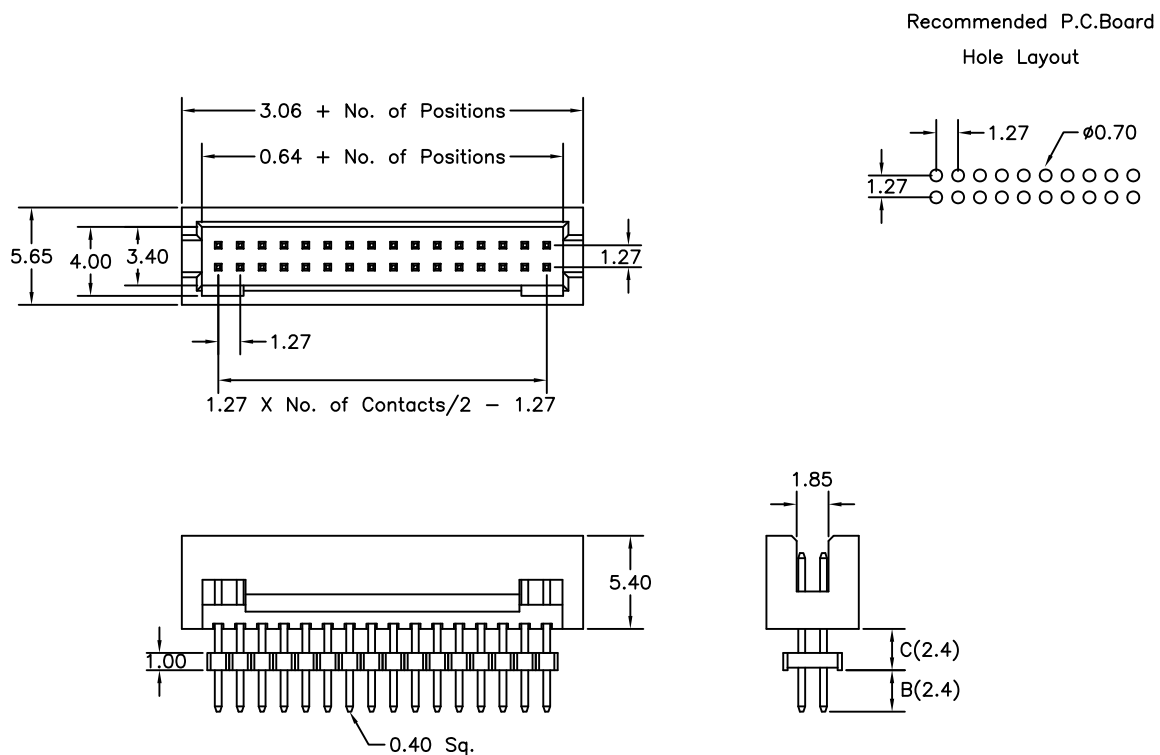

Tolerance:  $\pm 0.30\text{mm}$

## Order Information 0095 Series

Example: 0095 - 50 - 02 - C/B

Series No.	Number of Contacts	Contact Plating	Pin Length mm	
0095	10 to 100 Contacts	Tin Plated <span style="border: 1px solid black; padding: 2px;">01</span>	C	B
		Gold Plated	<span style="border: 1px solid black; padding: 2px;">2.4</span>	<span style="border: 1px solid black; padding: 2px;">2.4</span>
		Flash <span style="border: 1px solid black; padding: 2px;">02</span>		
		10 $\mu$ " <span style="border: 1px solid black; padding: 2px;">10</span>		
		30 $\mu$ " <span style="border: 1px solid black; padding: 2px;">30</span>		