

1.27mm×1.27mm (0.05"×0.05") SMD Female Header

(Dual Row)

0155C Series





APPLICATION AND FEATURES

- Mating with 1.27mm pitch and 0.4mm square pin header such as 0055D, 0081D, 0083D & 0228 series.
- RoHS compliant.

SPECIFICATIONS

Current Rating:	1 Amp
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	300V AC
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	230°C for 30 seconds and 260°C for 5 seconds
Contact Material:	Phosphor bronze
Insulator Material:	LCP, UL 94V-0

RECOMMENDED P.C.B LAYOUT

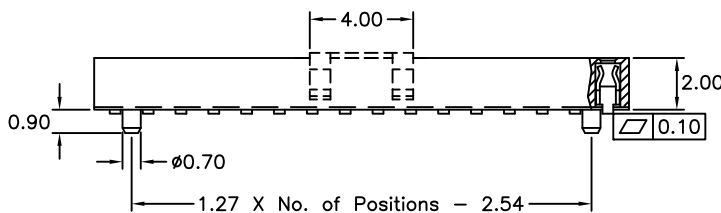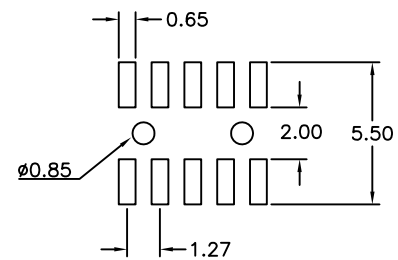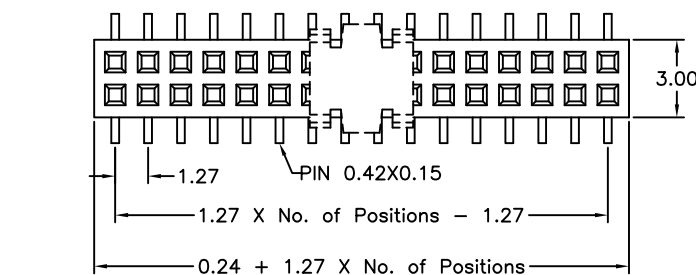

Tolerance: ±0.30mm

Order Information 0155C Series

Example: 0155C-40-02-1-PT-G

Series No. 0155C	Number of Contacts 06 to 80 Contacts	Contact Plating Tin Plated 01 Gold Plated Flash 02 10 μ" 10 30 μ" 30	Locating Peg With Locating peg 1	Null : Tube P : Cap + Tube PT: Cap + T&R
----------------------------	--	--	--	--