

# 1.27mm (0.05") Pin Header

Board Spacer  
(Single Row)


0204S Series

## APPLICATION AND FEATURES




- 0204S series headers are ideal for board stacking application.
- Suggestion mating with 0052S, 0053S & 0152S series.
- RoHS compliant.

## SPECIFICATIONS

Current Rating:	1 Amp
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Brass
Insulator Material:	Nylon 6T, UL 94V-0 (Black)



Recommended P.C.Board  
Hole Layout

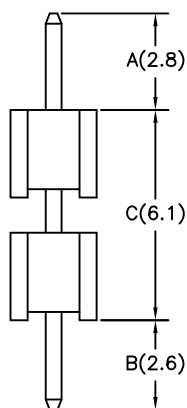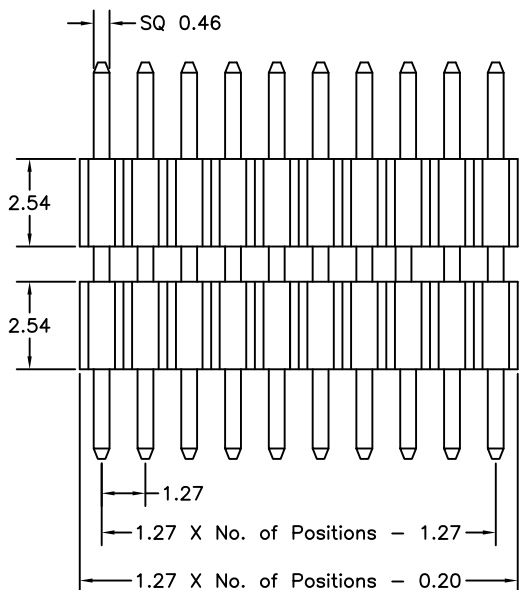

Tolerance: ±0.30mm

## Order Information 0204S Series

Example: 0204S-20-02-A/C/B

Series No.	Number of Contacts	Contact Plating	Pin Length mm		
0204S	03 to 32 Contacts	Tin Plated 01	A	C	B
		Gold Plated	2.8	6.1	2.6
		Flash 02	For 0052S		
		10 μ" 10	6.0	6.1	2.6
		30 μ" 30	For 0053S		