
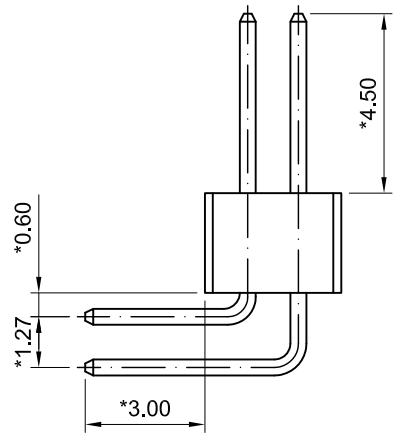
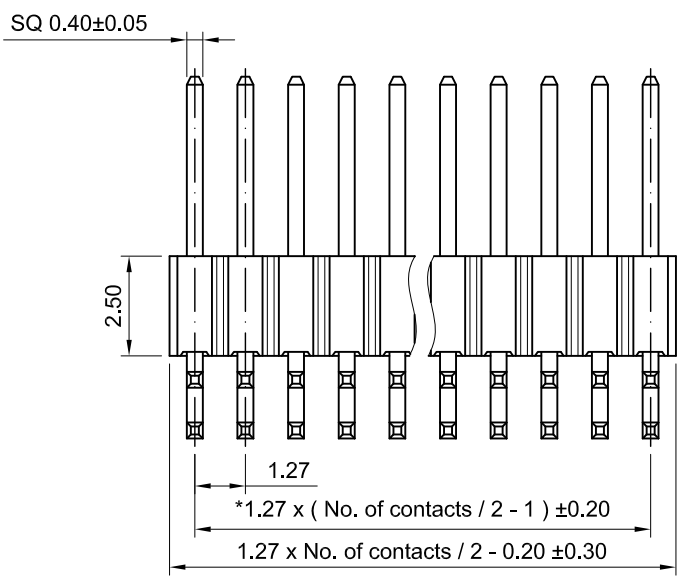


**HSF**  
Compliant

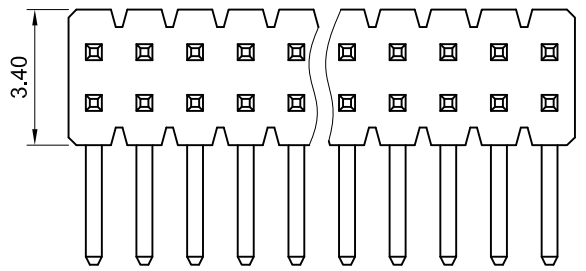


**Specifications**

- Current & Voltage Rating : 1A & 12Vac max.
- Insulation Resistance : 1000 MΩ min.
- Contact Resistance : 20 mΩ max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Max. Processing Temp. : 245±5°C for 3~5 seconds
- Contact Material : Brass
- Insulator Material : Nylon-6T (H.F.), UL 94V-0 (Black)
- Finish : Gold Flash plated overall
- Packing: Bag

0228-XX-RJ1-02-4.5/3.0

No. of contacts

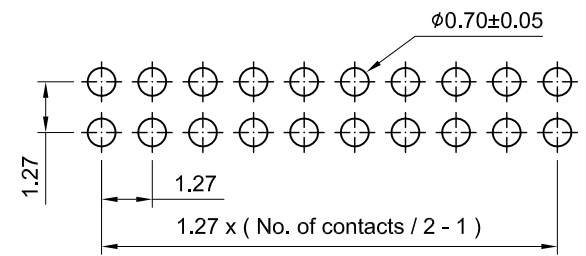

Recommended P.C.B. Layout

GENERAL TOLERANCES:

±0.30

**Singatron Enterprise Co., Ltd.**

<b>TITLE</b>	1.27x1.27mm Pin Header, Dual Rows, Right Angle Type		
<b>DWN</b>	張嘉麟	<b>PART NO.</b>	0228-XX-RJ1-02-4.5/3.0
<b>CHKD</b>	2023/06/13	<b>SCALE</b>	1:1
<b>APVD</b>		<b>UNIT:</b>	mm
		<b>SIZE:</b>	A3
		<b>SHEET:</b>	1 OF 1
		<b>REV:</b>	A

**CUSTOMER COPY**