

# 2.0mm (0.079") Female Header

Quad Row 24 to 120 Contacts  
Straight

1067 Series





## APPLICATION AND FEATURES

1. Low Profile: 6.35mm height.
2. High quality dual beam phosphor bronze contacts.
3. Designed for board to board small spacing interconnection.
4. Standoffs facilitate post soldering clean.
5. Suggestion mating with 1068 series.
6. RoHS compliant.

## SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Brass
Insulator Material:	Nylon 9T, UL 94V-0 (Black)

Recommended P.C.Board  
Hole Layout

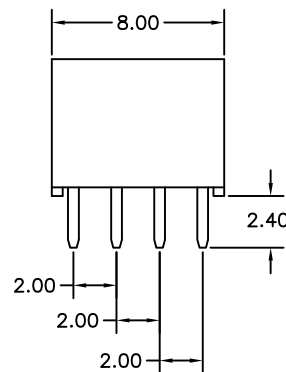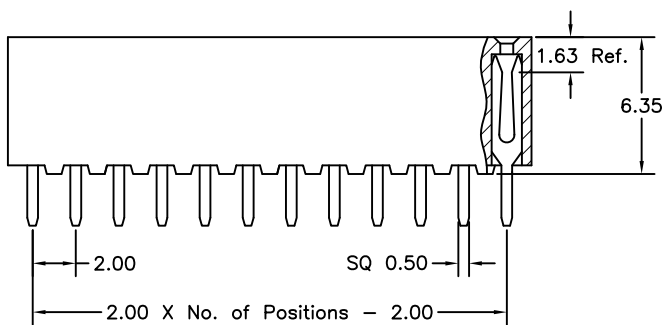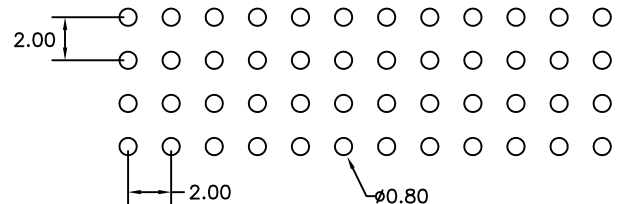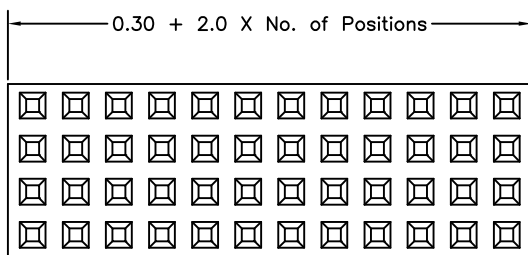

Tolerance: ±0.30mm

## Order Information 1067 Series

Example: 1067-120-S-02-2.4

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1067	24 to 120 Contacts	Straight S	Tin Plated 01	2.4
			Gold Plated	
			Flash 02	
			10 μ" 10	
			30 μ" 30	