

2.0mm (0.079") Pin Header

*Straight and Right Angle, 1.5mm Base
(Dual Row)*

1202 Series








APPLICATION AND FEATURES

1. Side and end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Variable pin length, gold, selective gold or tin plated.
4. Standoffs facilitate post soldering clean.
5. Mate with P.C.Board connectors such as 1212, 1213, 1312, 1215 & 1206 series.
6. RoHS compliant.

SPECIFICATIONS

Current Rating: 2 Amp
 Insulator Resistance: 3000 Megohms min.
 Contact Resistance: 20 m ohm Max.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 245±5°C for 3-5 seconds
 Contact Material: Brass
 Insulator Material: Nylon 6T, UL 94V-0, Black

Recommended P.C.Board
Hole Layout

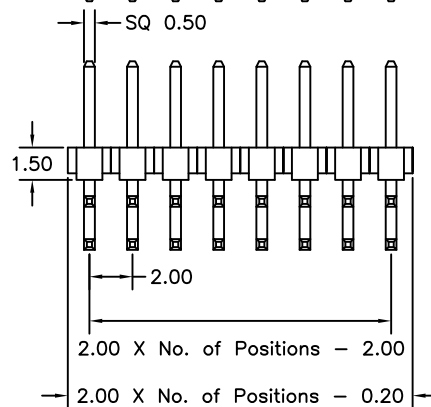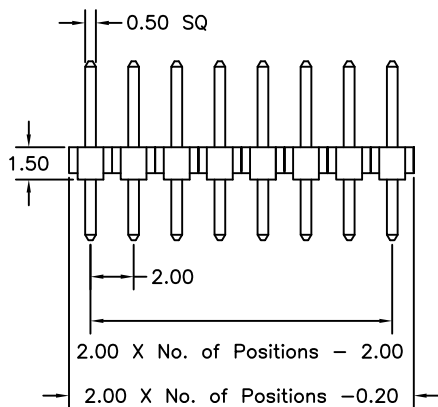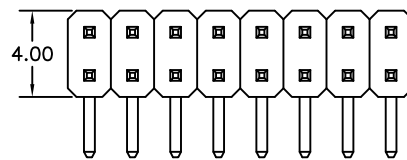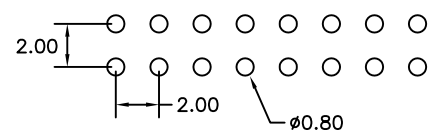

Tolerance: ±0.30mm

Order Information 1202 Series

Example: 1202-34-NS1-02-A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1202	04 to 80 Contacts	Straight NS1	Tin Plated 01	A B
		Right Angle NR1	Gold Plated	4.0 2.8
			Flash 02	
			10 μ" 10	
			30 μ" 30	