

2.0mm (0.079") Pin Header

Straight, 2.0mm Base
(Dual Row, SMT Type)

1202M Series





APPLICATION AND FEATURES

1. Side and end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Variable pin length, gold, selective gold or tin plated.
4. Standoffs facilitate post soldering clean.
5. Mate with P.C.Board connectors such as 1212, 1213, 1312, 1215 & 1206 series.
6. RoHS compliant.

SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	3000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Brass
Insulator Material:	Nylon 6T, UL 94V-0, Black

Recommended P.C.Board
Hole Layout

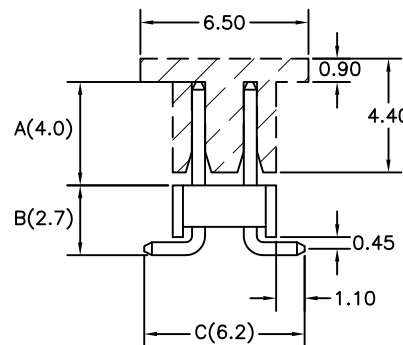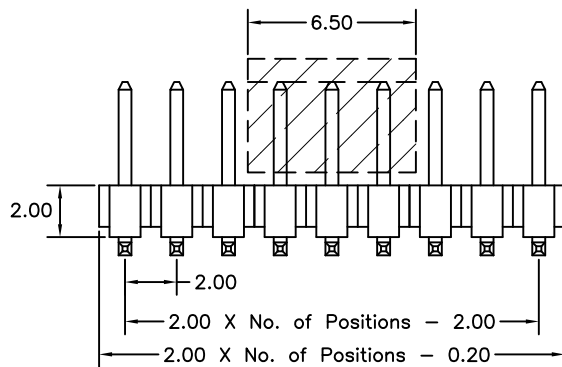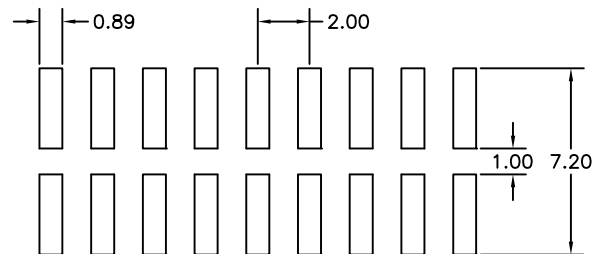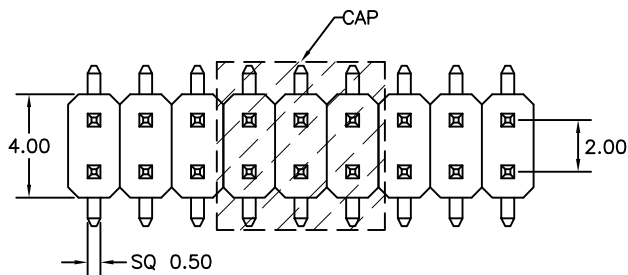

Tolerance: ±0.30mm

Order Information 1202M Series

Example: 1202M-34-NS2-02-A/B/C-0-PT

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1202M	04 to 80 Contacts	Straight NS2	Tin Plated 01	A B C
			Gold Plated	4.0 2.7 6.2
			Flash 02	
			10 μ" 10	Null: Tube
			30 μ" 30	P: Cap+Tube
				PT: Cap+T&R