

2.0mm (0.079") Pin Header

Straight and Right Angle, 2.0mm Base
(Dual Row)

1202 Series








APPLICATION AND FEATURES

1. Side and end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Variable pin length, gold, selective gold or tin plated.
4. Standoffs facilitate post soldering clean.
5. Mate with P.C.Board connectors such as 1212, 1213, 1312, 1215 & 1206 series.
6. RoHS compliant.

SPECIFICATIONS

| | |
|--------------------------|----------------------|
| Current Rating: | 2 Amp |
| Insulator Resistance: | 3000 Megohms min. |
| Contact Resistance: | 20 m ohm Max. |
| Dielectric Withstanding: | AC 500 V |
| Operating Temperature: | -25°C to +85°C |
| Contact Material: | Brass |
| Insulator Material: | PBT, UL 94V-0, Black |

Recommended P.C.Board
Hole Layout

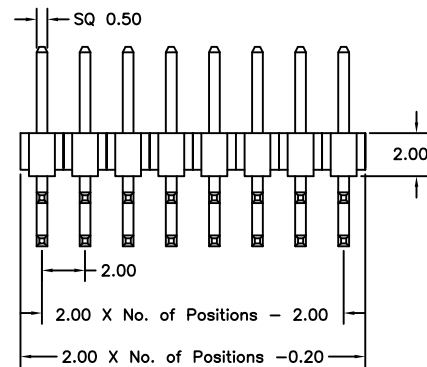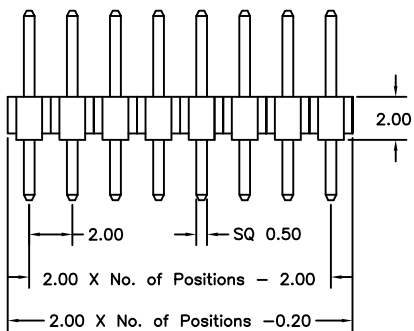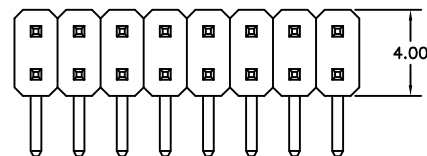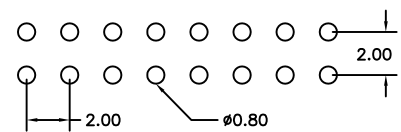

Tolerance: ±0.30mm

Order Information 1202 Series

Example: 1202-34-S2-02-A/B

| Series No. | Number of Contacts | Connector Type | Contact Plating | Pin Length mm |
|------------|--------------------|----------------|-----------------|---------------|
| 1202 | 04 to 80 Contacts | Straight S2 | Tin Plated 01 | A B |
| | | Right Angle R2 | Gold Plated | 4.0 2.8 |
| | | | Flash 02 | |
| | | | 10 μ" 10 | |
| | | | 30 μ" 30 | |