

2.0mm (0.079") Pin Header

Board Spacer

1204D-S1 Series





APPLICATION AND FEATURES

1. Notches for easy breakable.
2. Variable pin length.
3. Standoffs facilitate post soldering clean.
4. Maintain the dimension between two P.C.Boards.
5. RoHS compliant.

SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	3000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max. Processing Temp.:	245±5°C for 3-5 seconds
Contact Material:	Brass
Insulator Material:	Nylon 6T, UL 94V-0, Black

Recommended P.C.Board Hole Layout

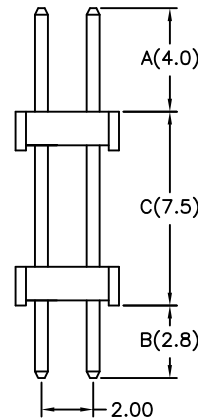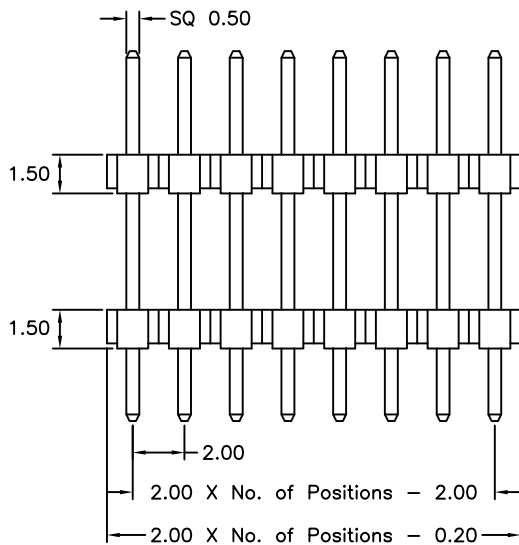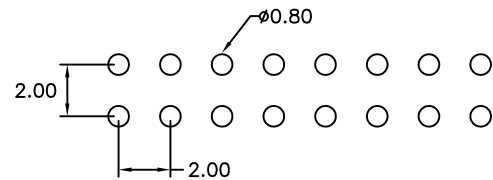

Tolerance: ±0.30mm

Order Information 1204D Series

Example: 1204D-34-S1-02-A/C/B

Series No.	Number of Contacts	Connector Type		Contact Plating			Pin Length mm		
		Straight	S1	Tin Plated	01	A	C	B	
1204D	04 to 80 Contacts			Gold Plated		4.0	7.5	2.6	
1204D (Dual Row)				Flash	02				
				10 μ"	10				
				30 μ"	30				