

2.0mm (0.079") Pin Header

Board Spacer

1204X-HT Series




APPLICATION AND FEATURES

1. Notches for easy breakable.
2. Variable pin length.
3. Standoffs facilitate post soldering clean.
4. Maintain the dimension between two P.C.Boards.
5. RoHS compliant.





SPECIFICATIONS

Current Rating:	2 Amps
Insulator Resistance:	3000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max. Processing Temp.:	245±5°C for 3-5 seconds
Contact Material:	Brass
Insulator Material:	Nylon 6T, UL 94V-0, Black

Recommended P.C.Board
Hole Layout

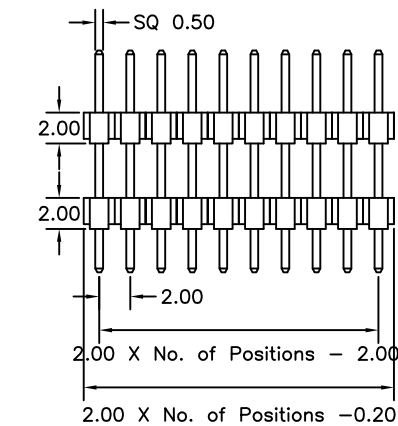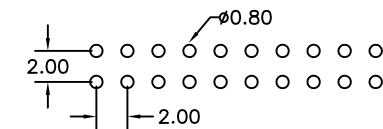

Recommended P.C.Board
Hole Layout

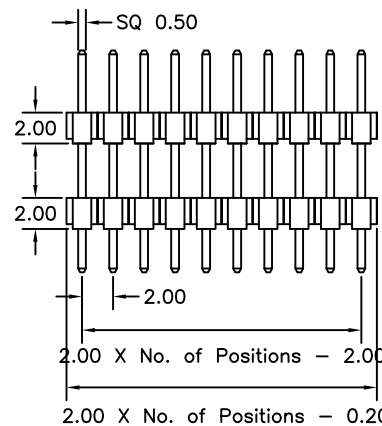

Tolerance: ±0.30mm

Order Information 1204 Series

Example: 1204S-34-S-02-A/C/B-HT

Series No.	Number of Contacts	Connector Type		Contact Plating			Pin Length mm		
		Straight	S	Tin Plated	01	A	C	B	
1204S	02 to 80 Contacts			Gold Plated		4.0	7.5	2.8	
1204S (Single Row)	02 to 40 Contacts			Flash	02				
1204D (Dual Row)	04 to 80 Contacts			10 μ"	10				
				30 μ"	30				